






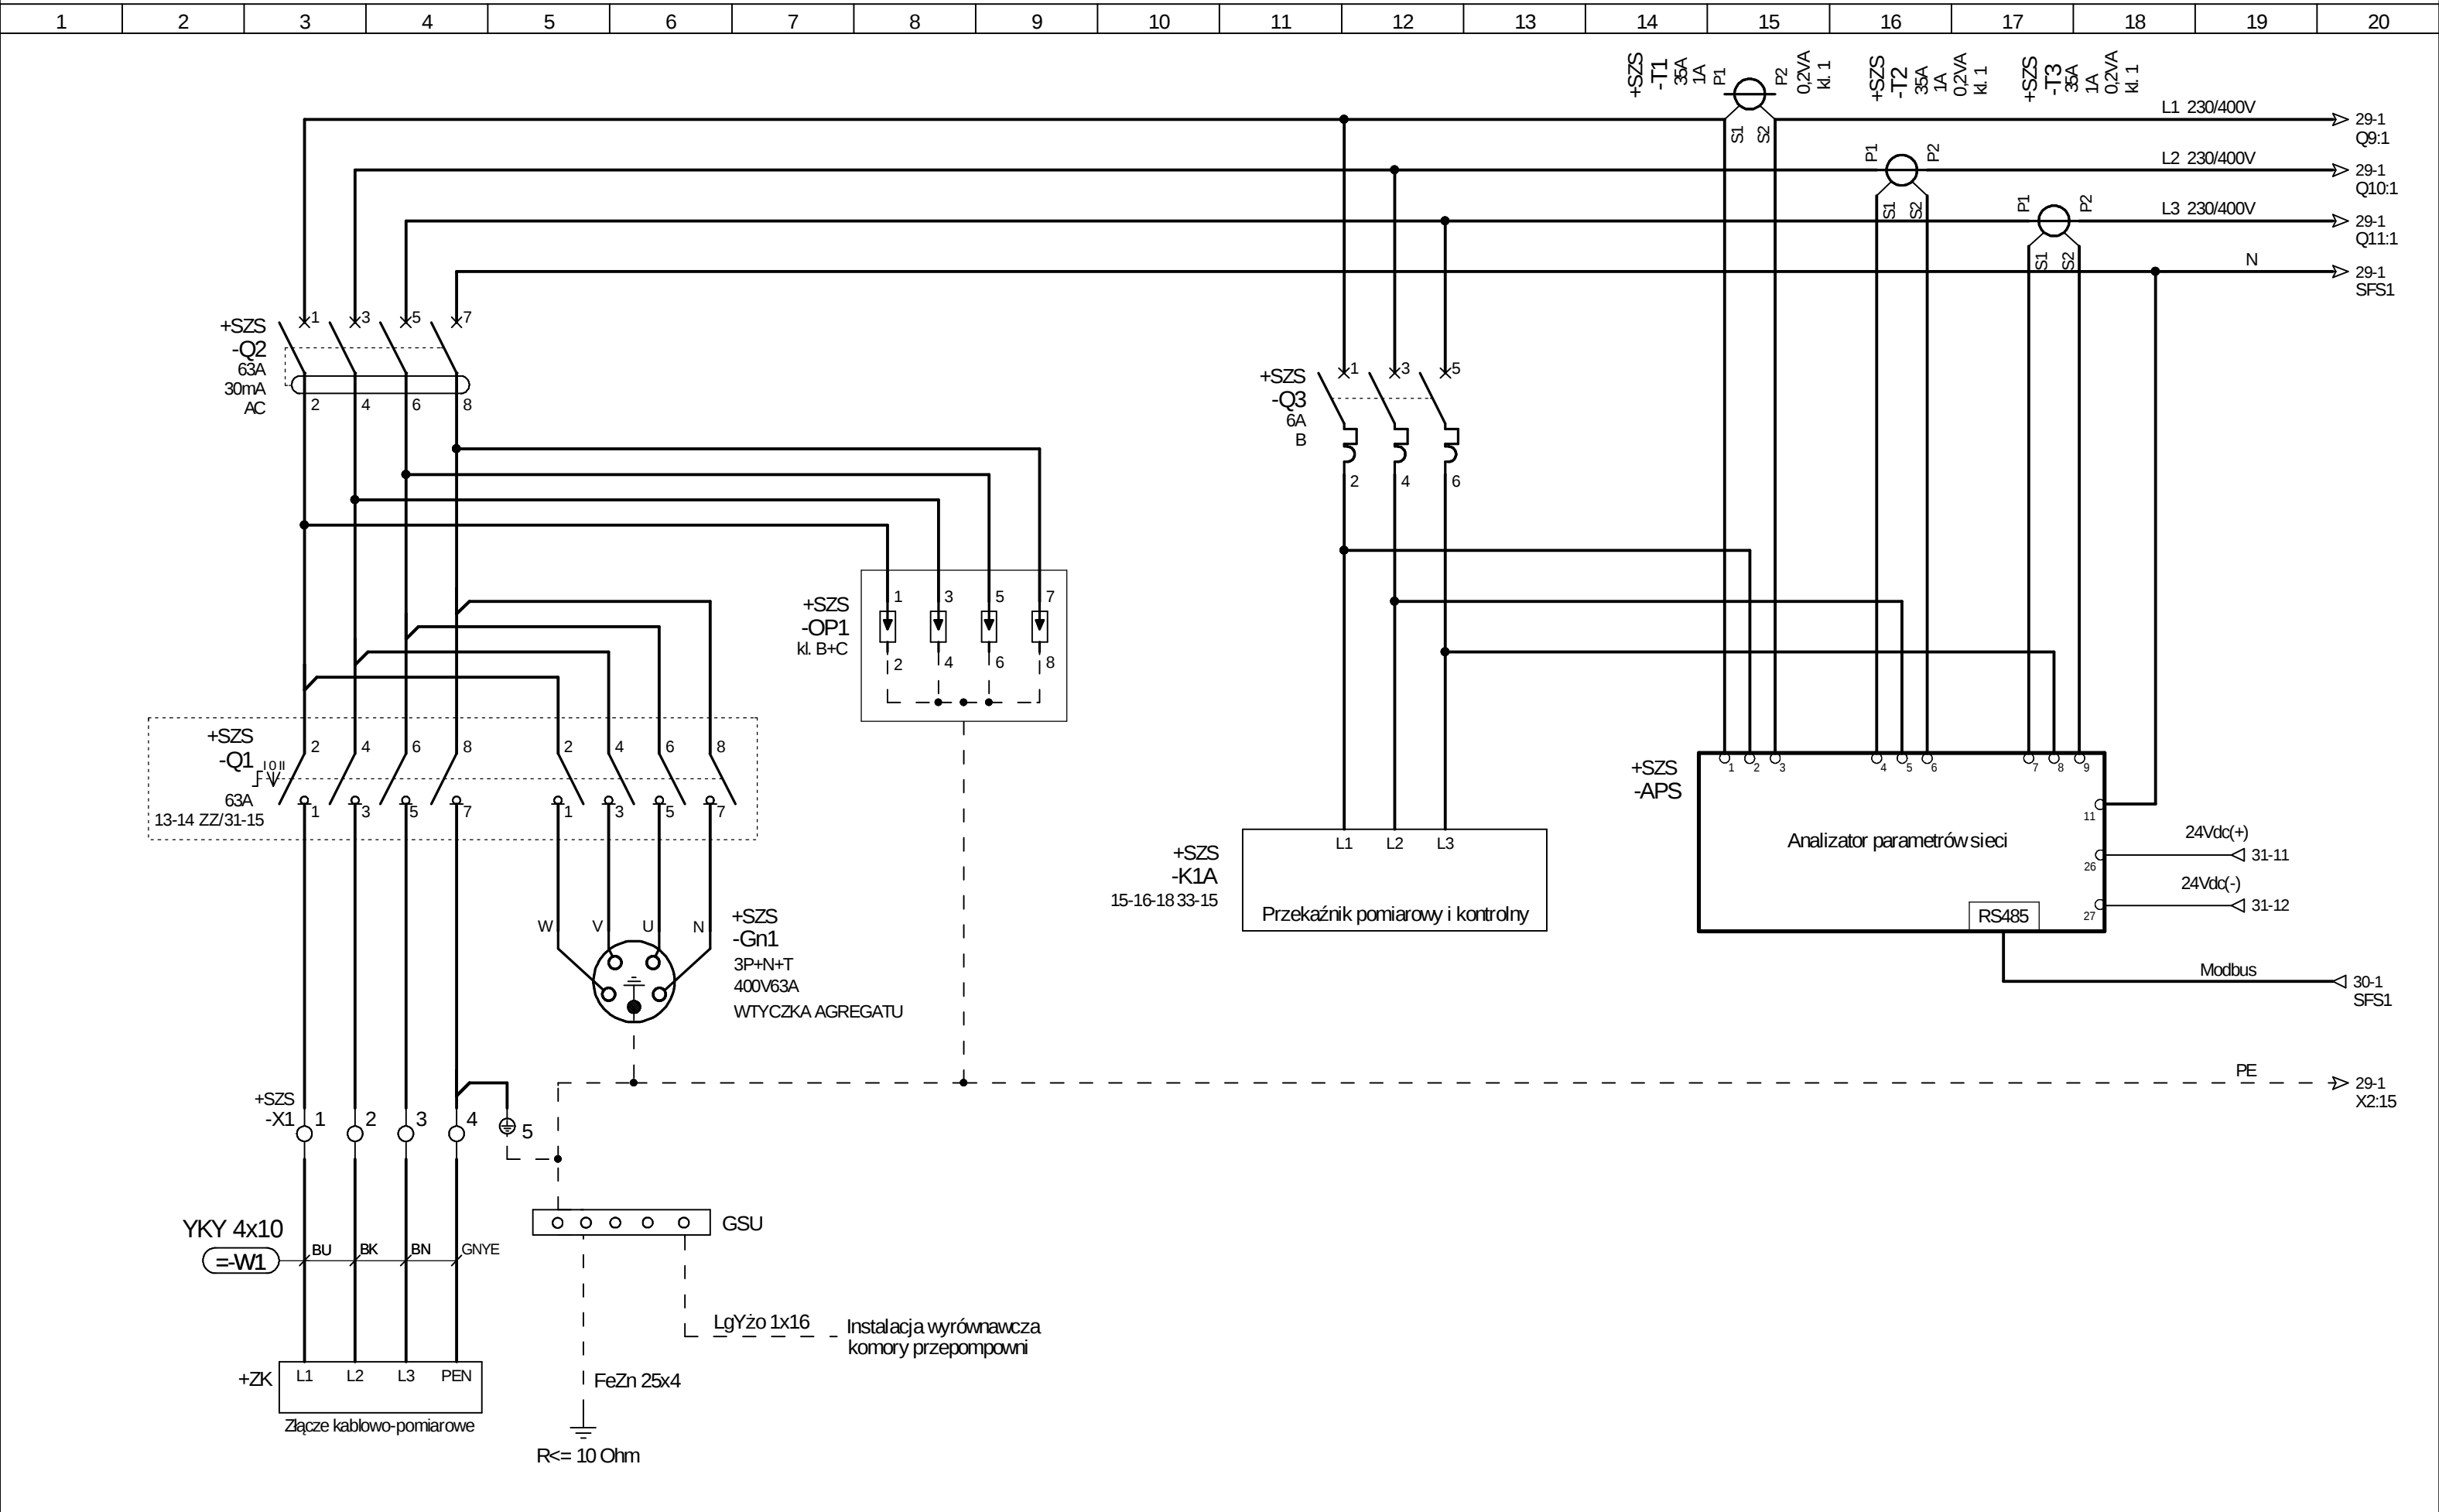

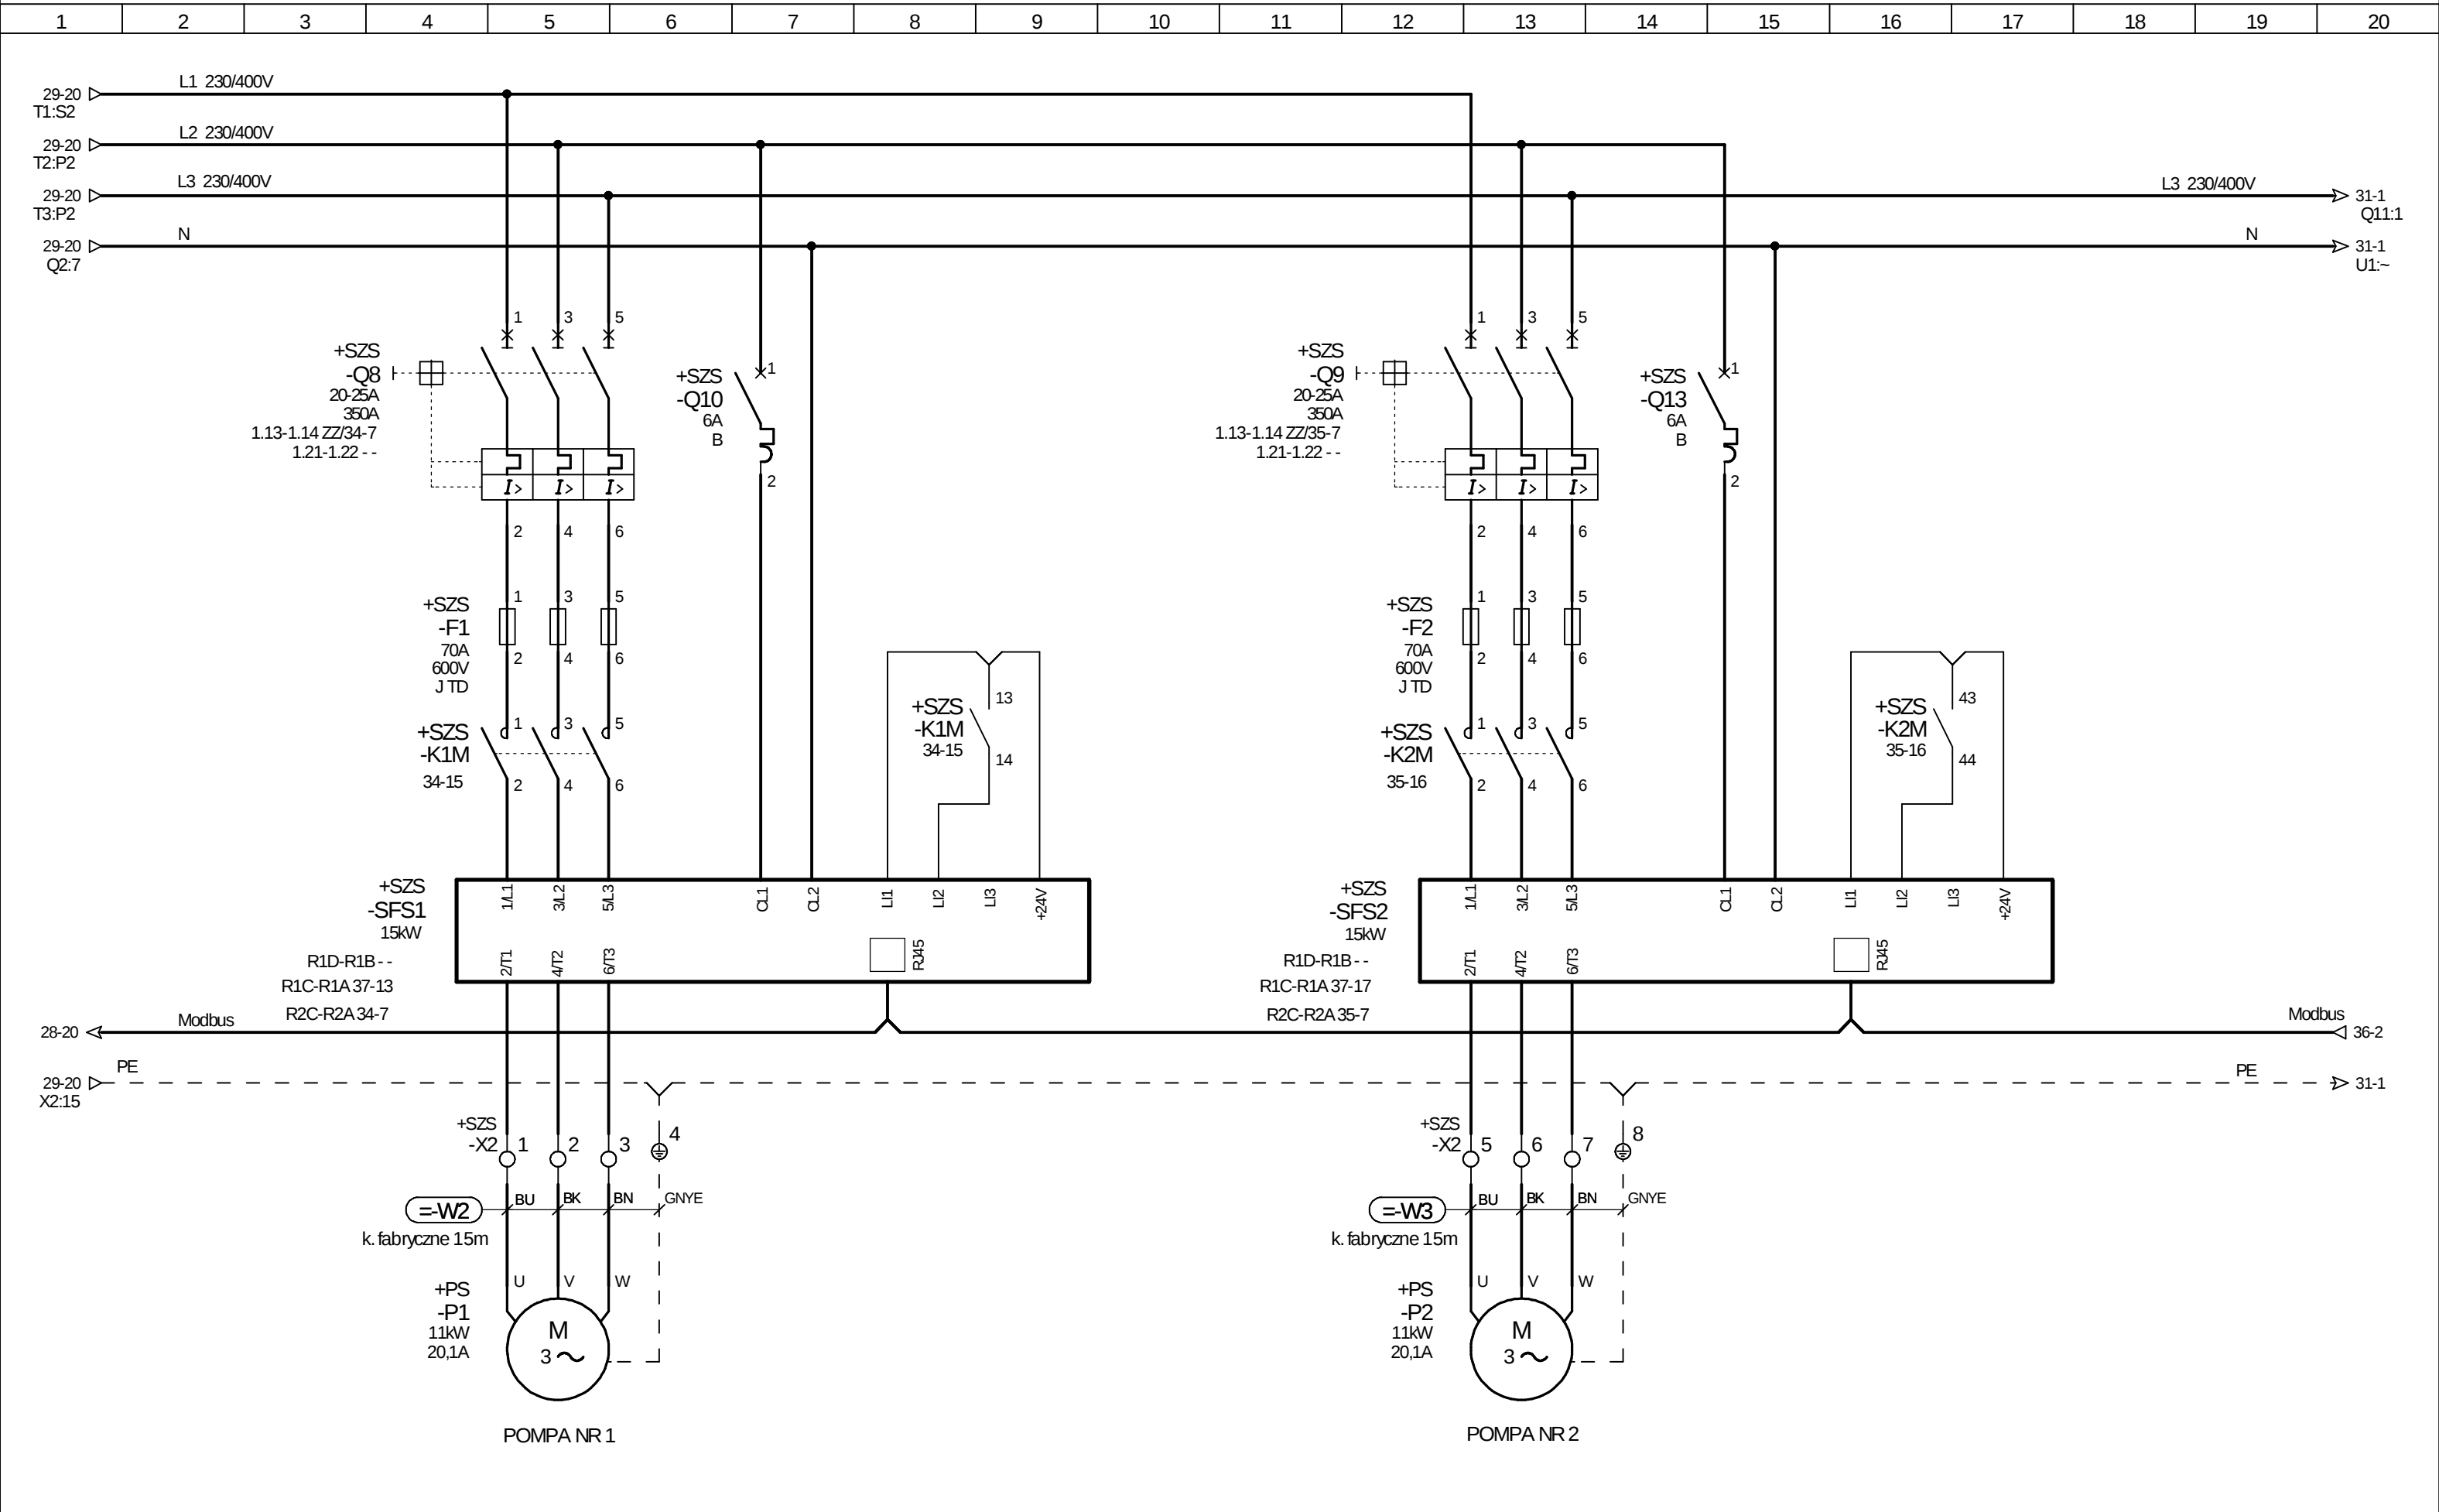

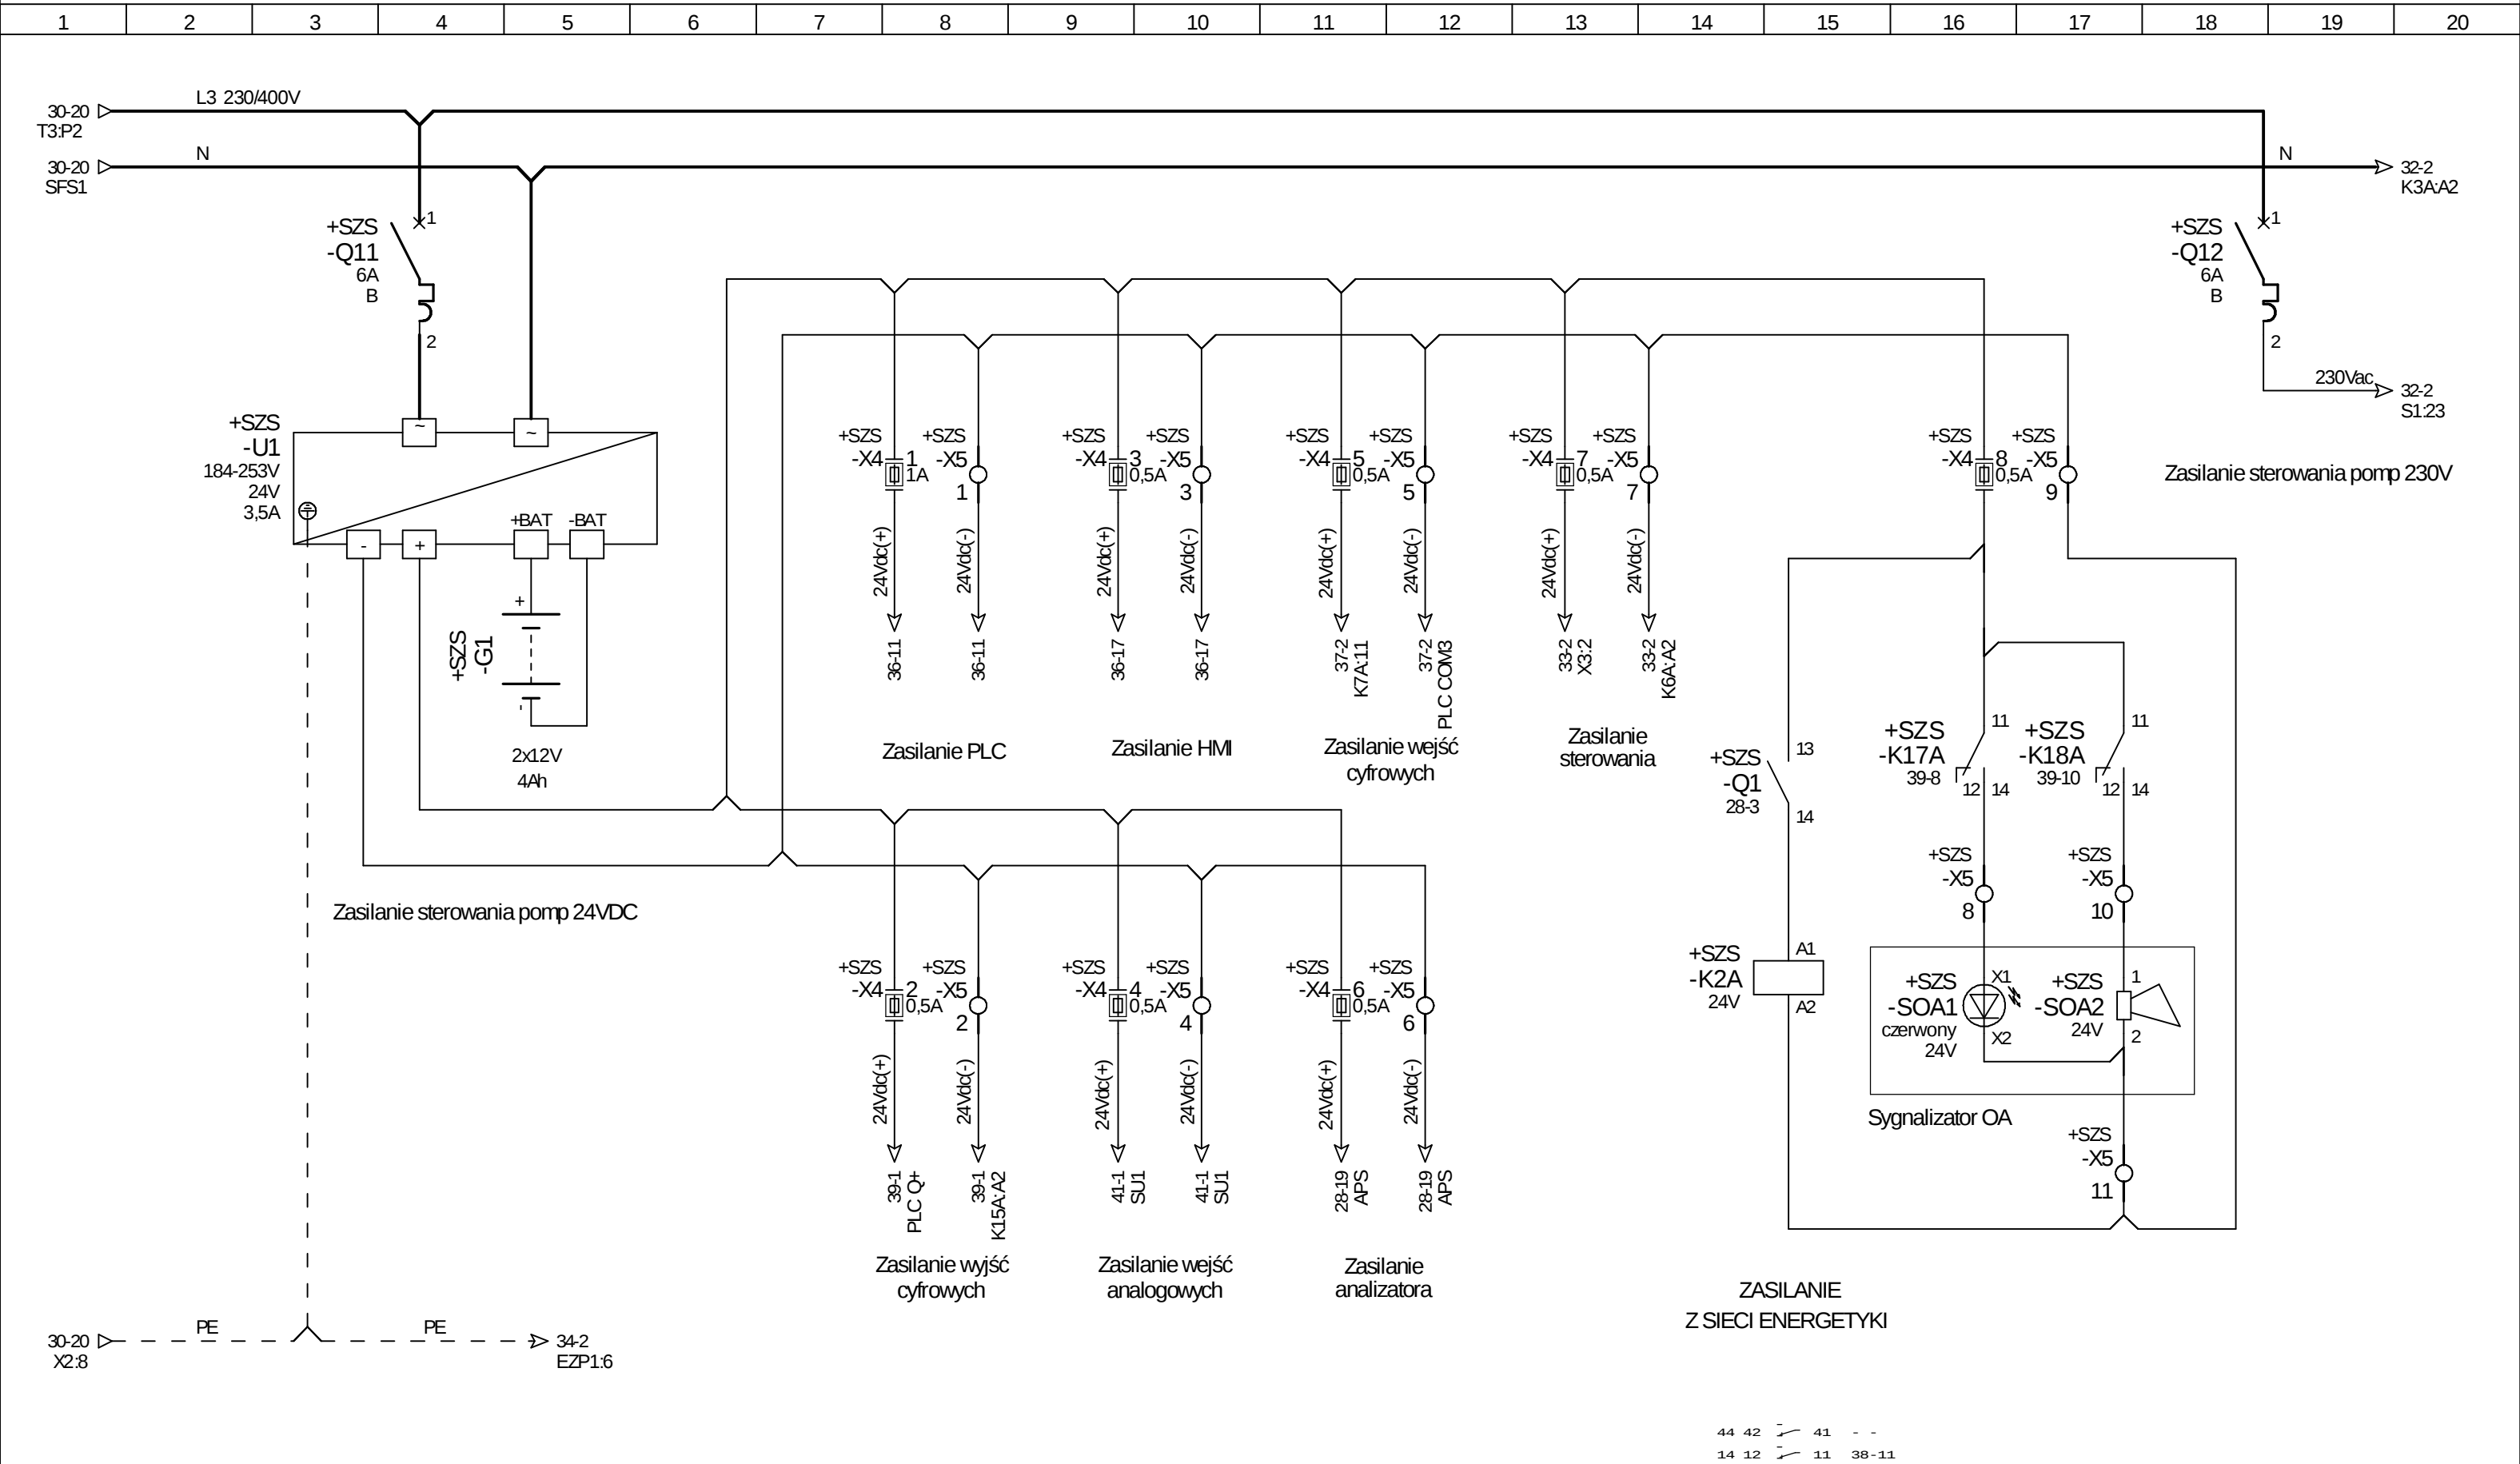

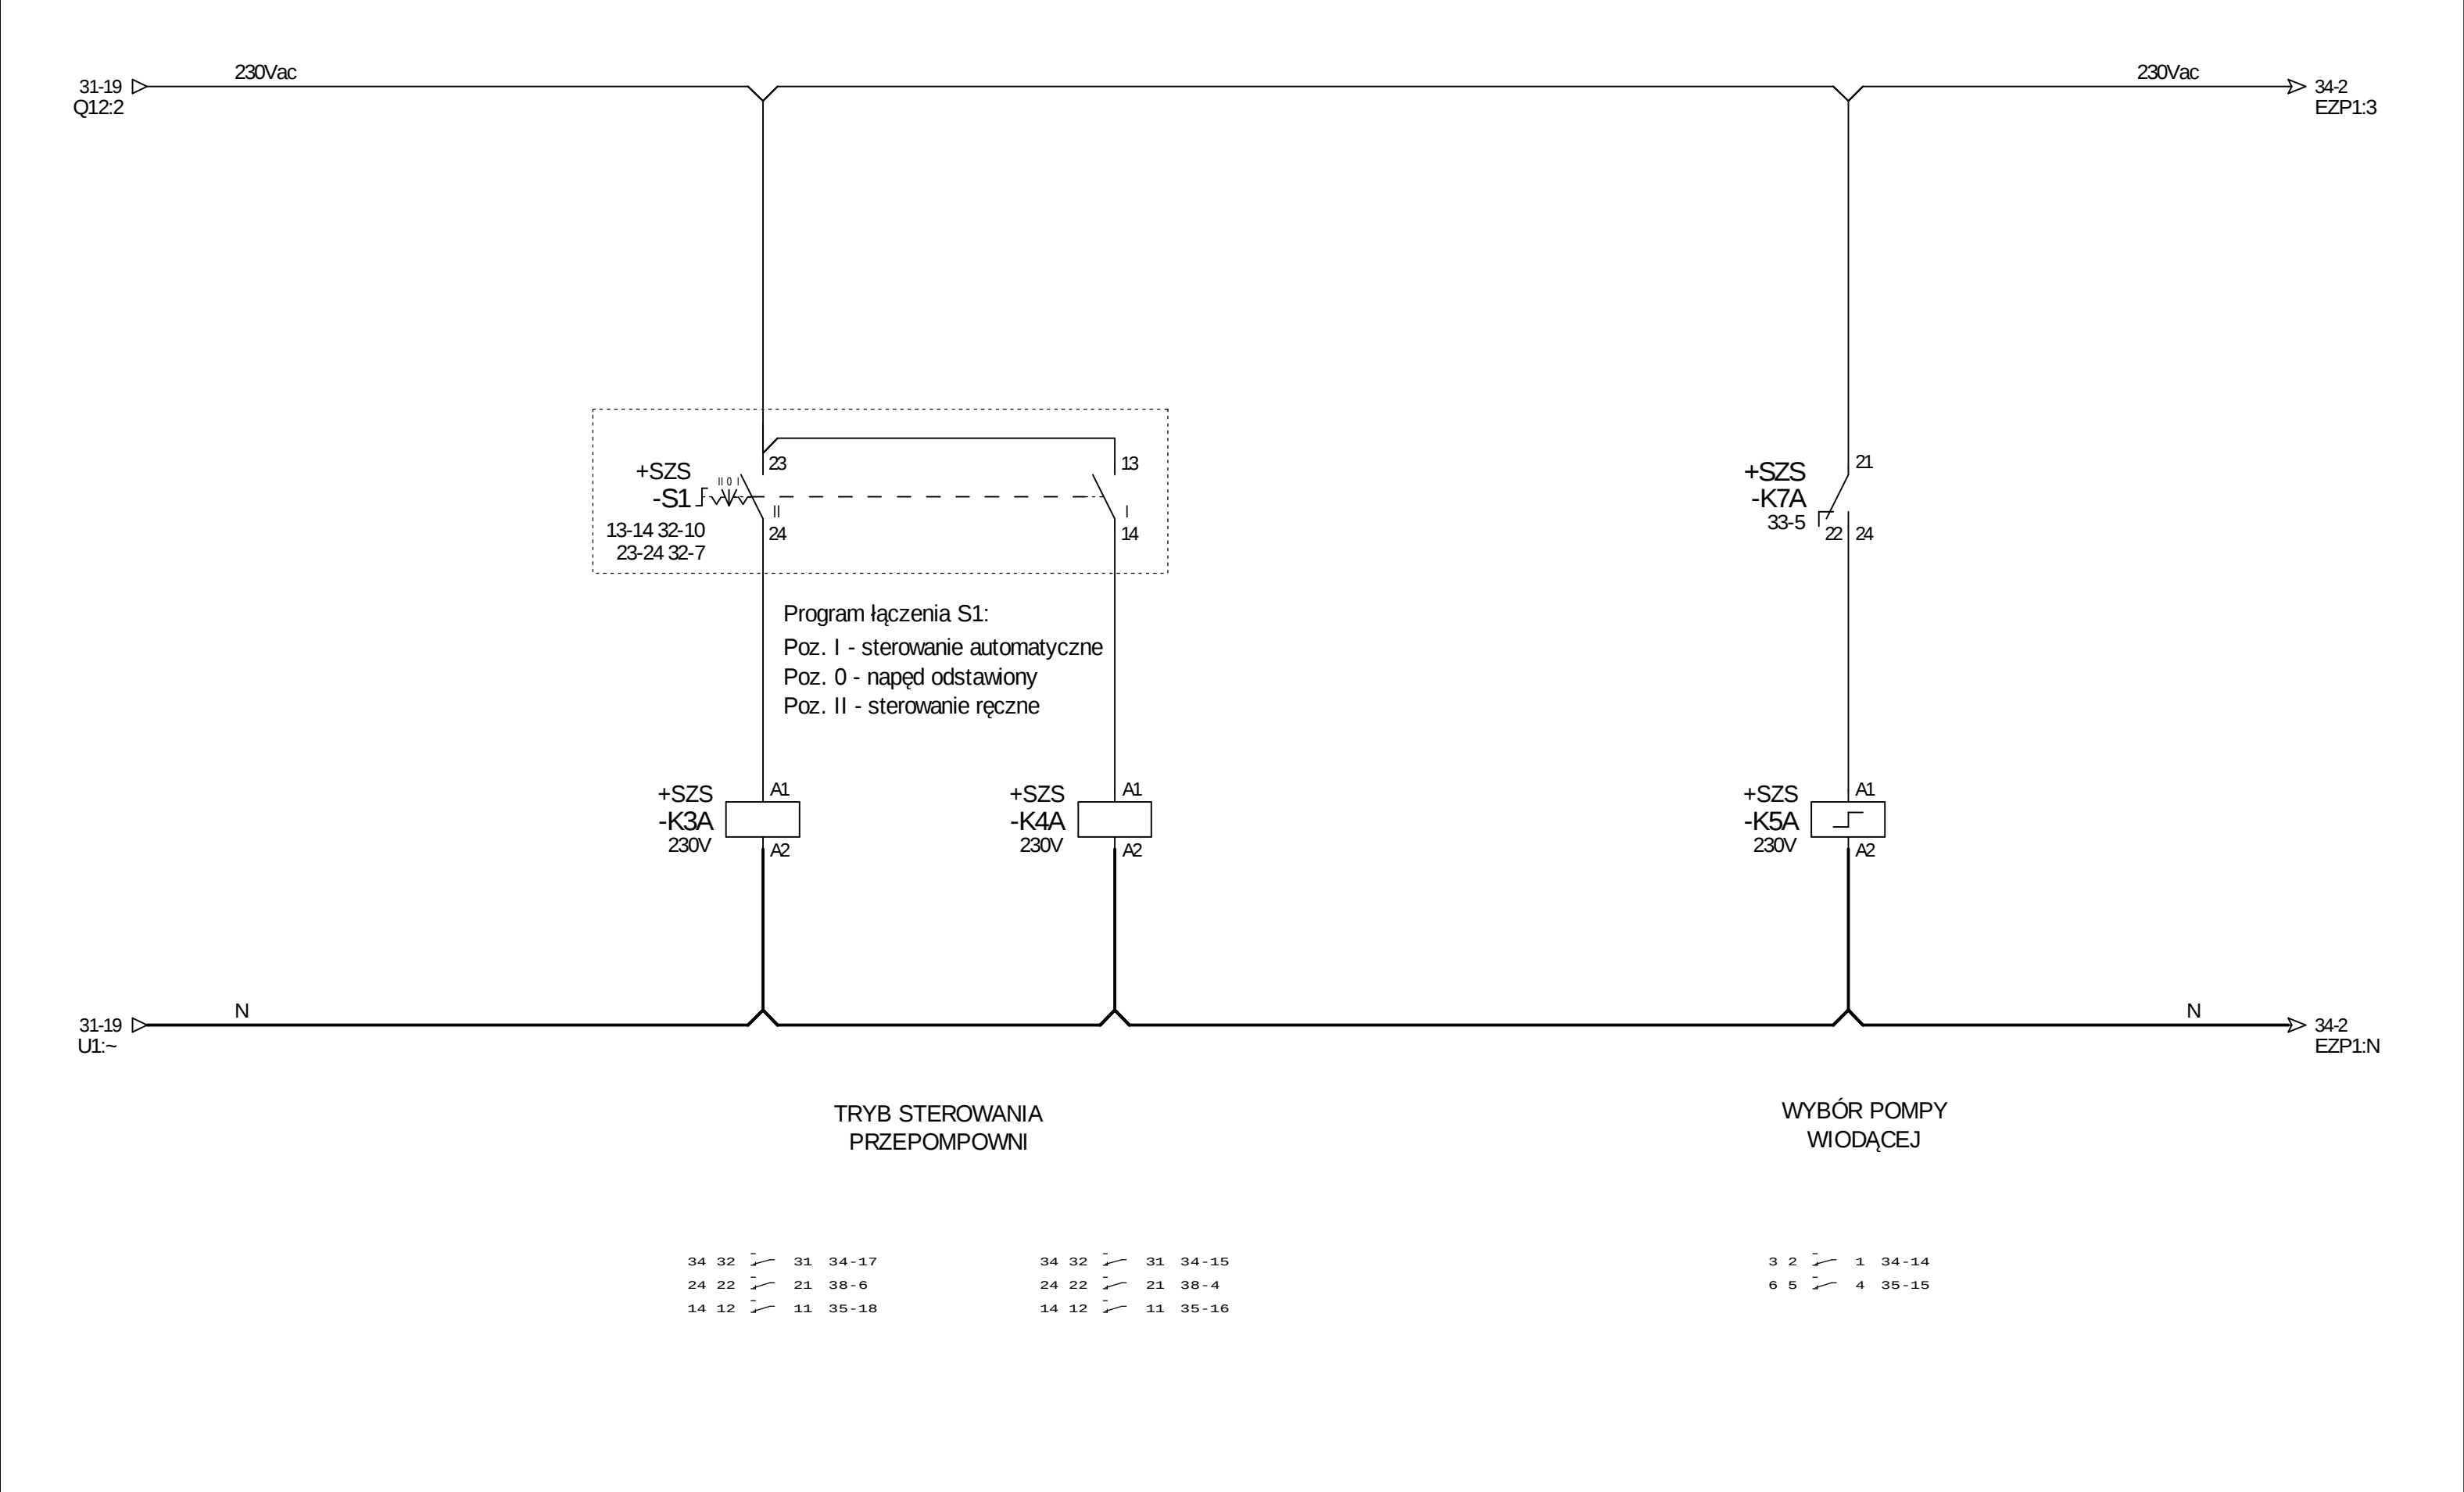

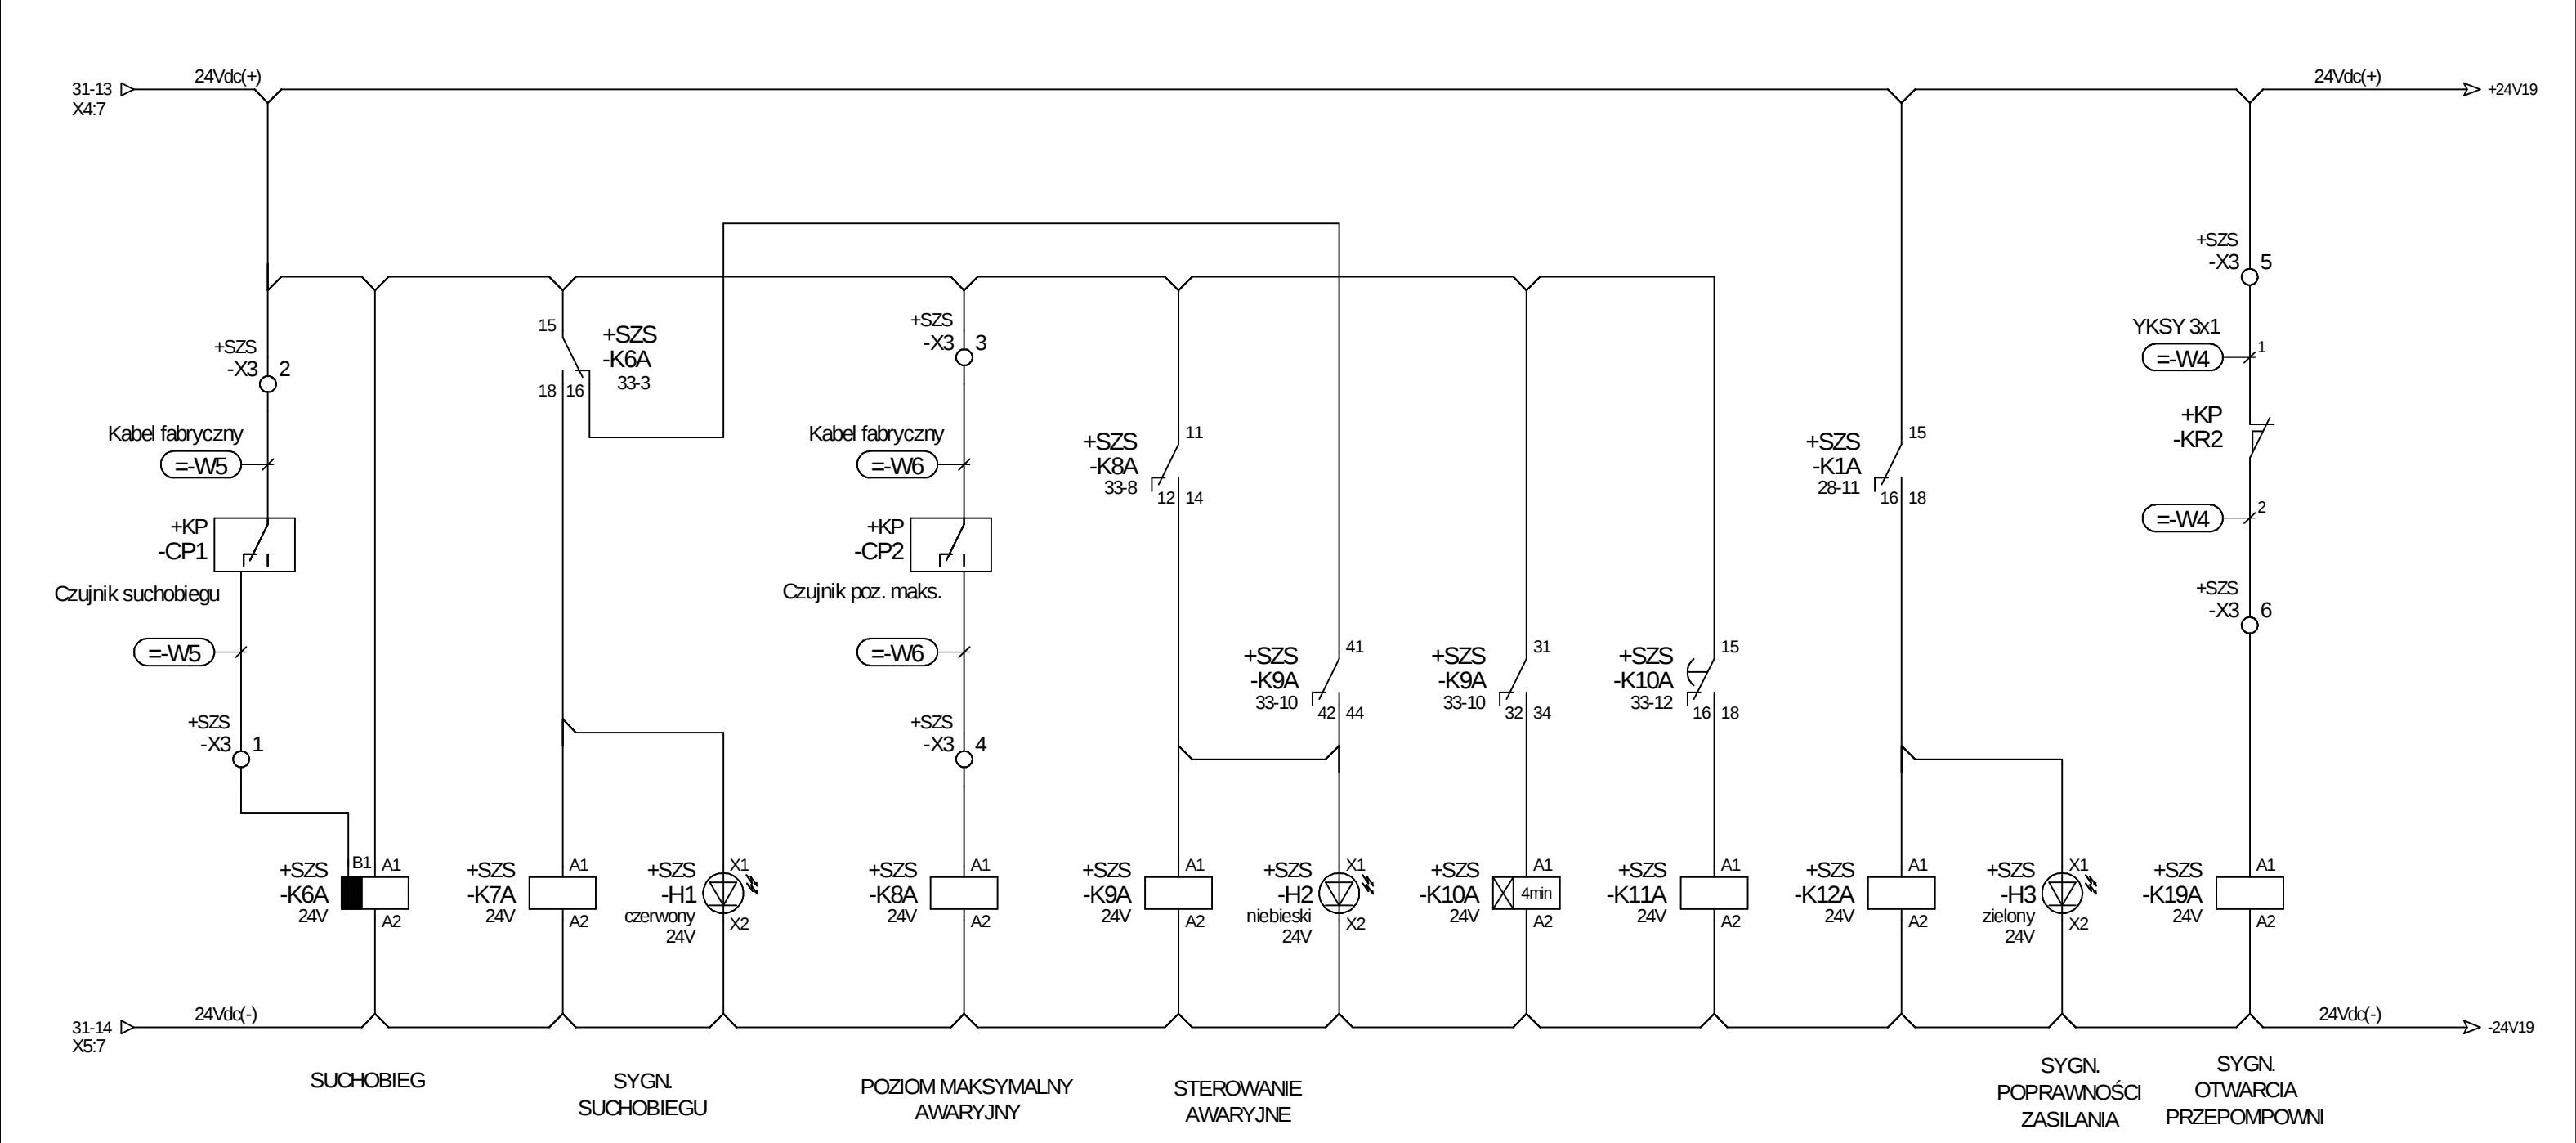


18 16 15 33-5 44 42 41 34-10
34 32 31 35-10
24 22 21 32-16
14 12 11 37-4


44 42 41 37-6
14 12 11 33-10

44 42 41 33-11
34 32 31 33-12
24 22 21 37-7
14 12 11 - -


18 16 15 33-14 44 42 41 34-14 44 42 41 34-10
14 12 11 35-15 34 32 31 35-10
24 22 21 37-9
14 12 11 - -

44 42 41 - -
14 12 11 38-15

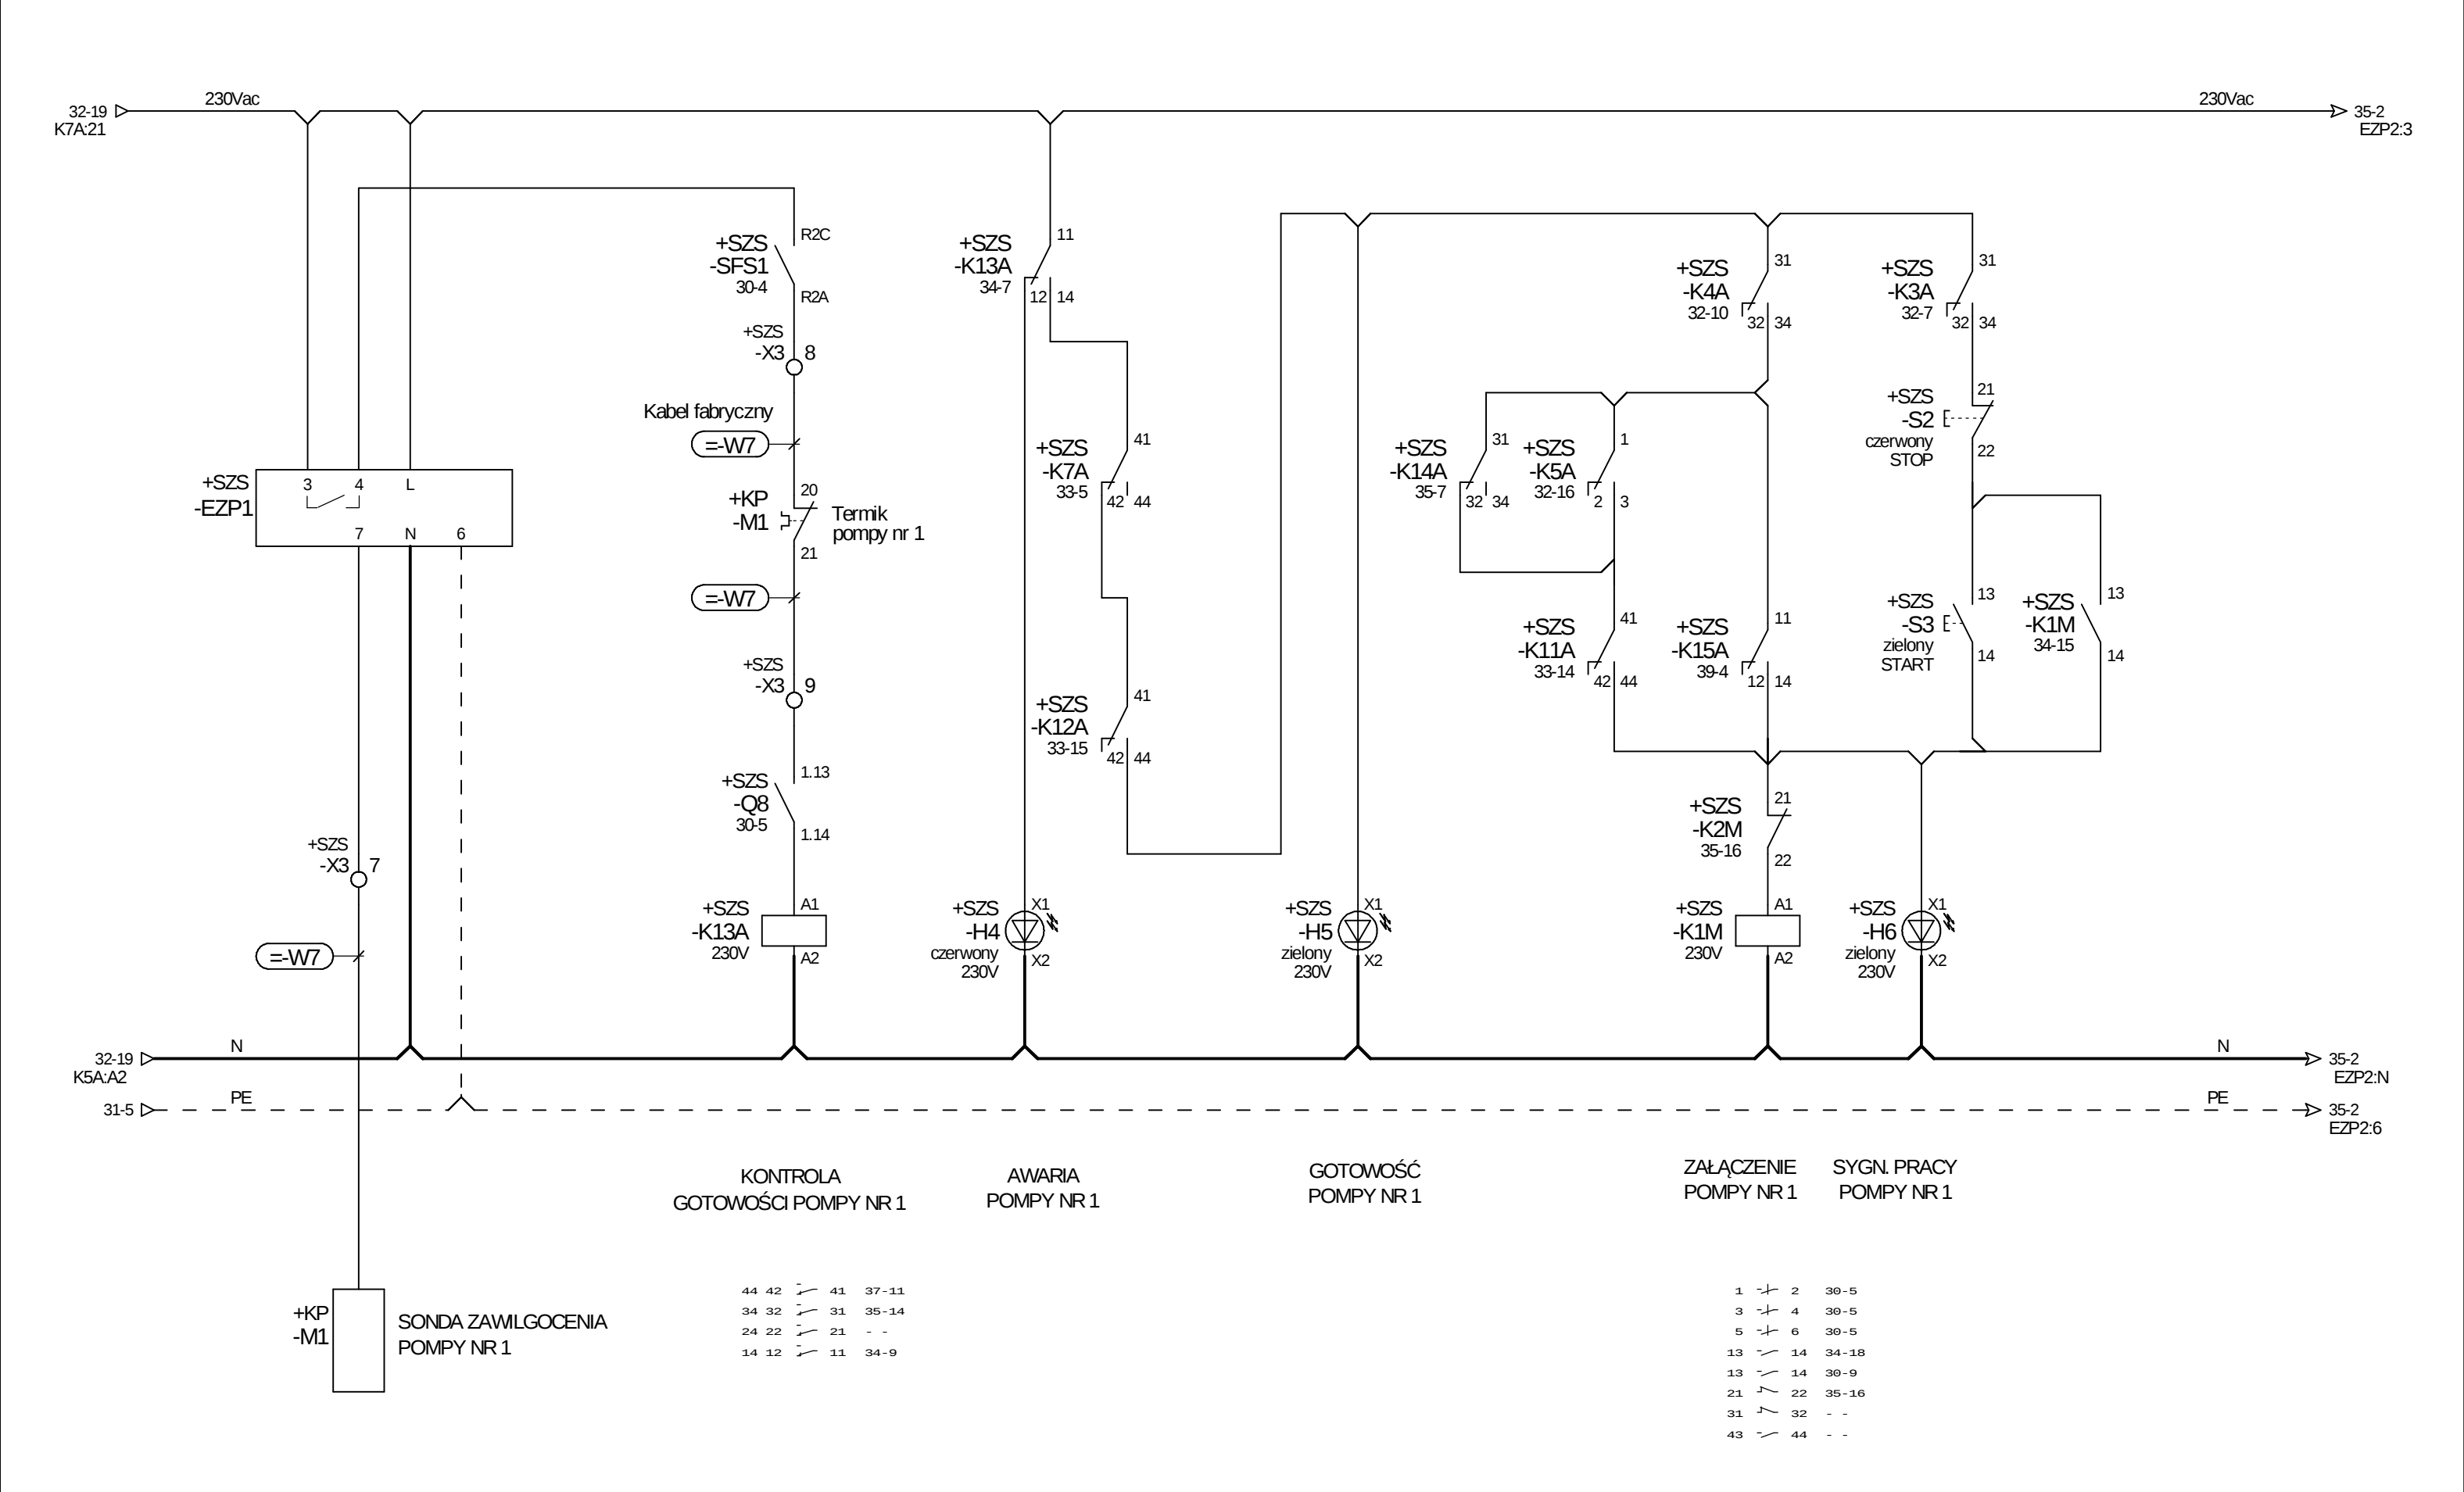


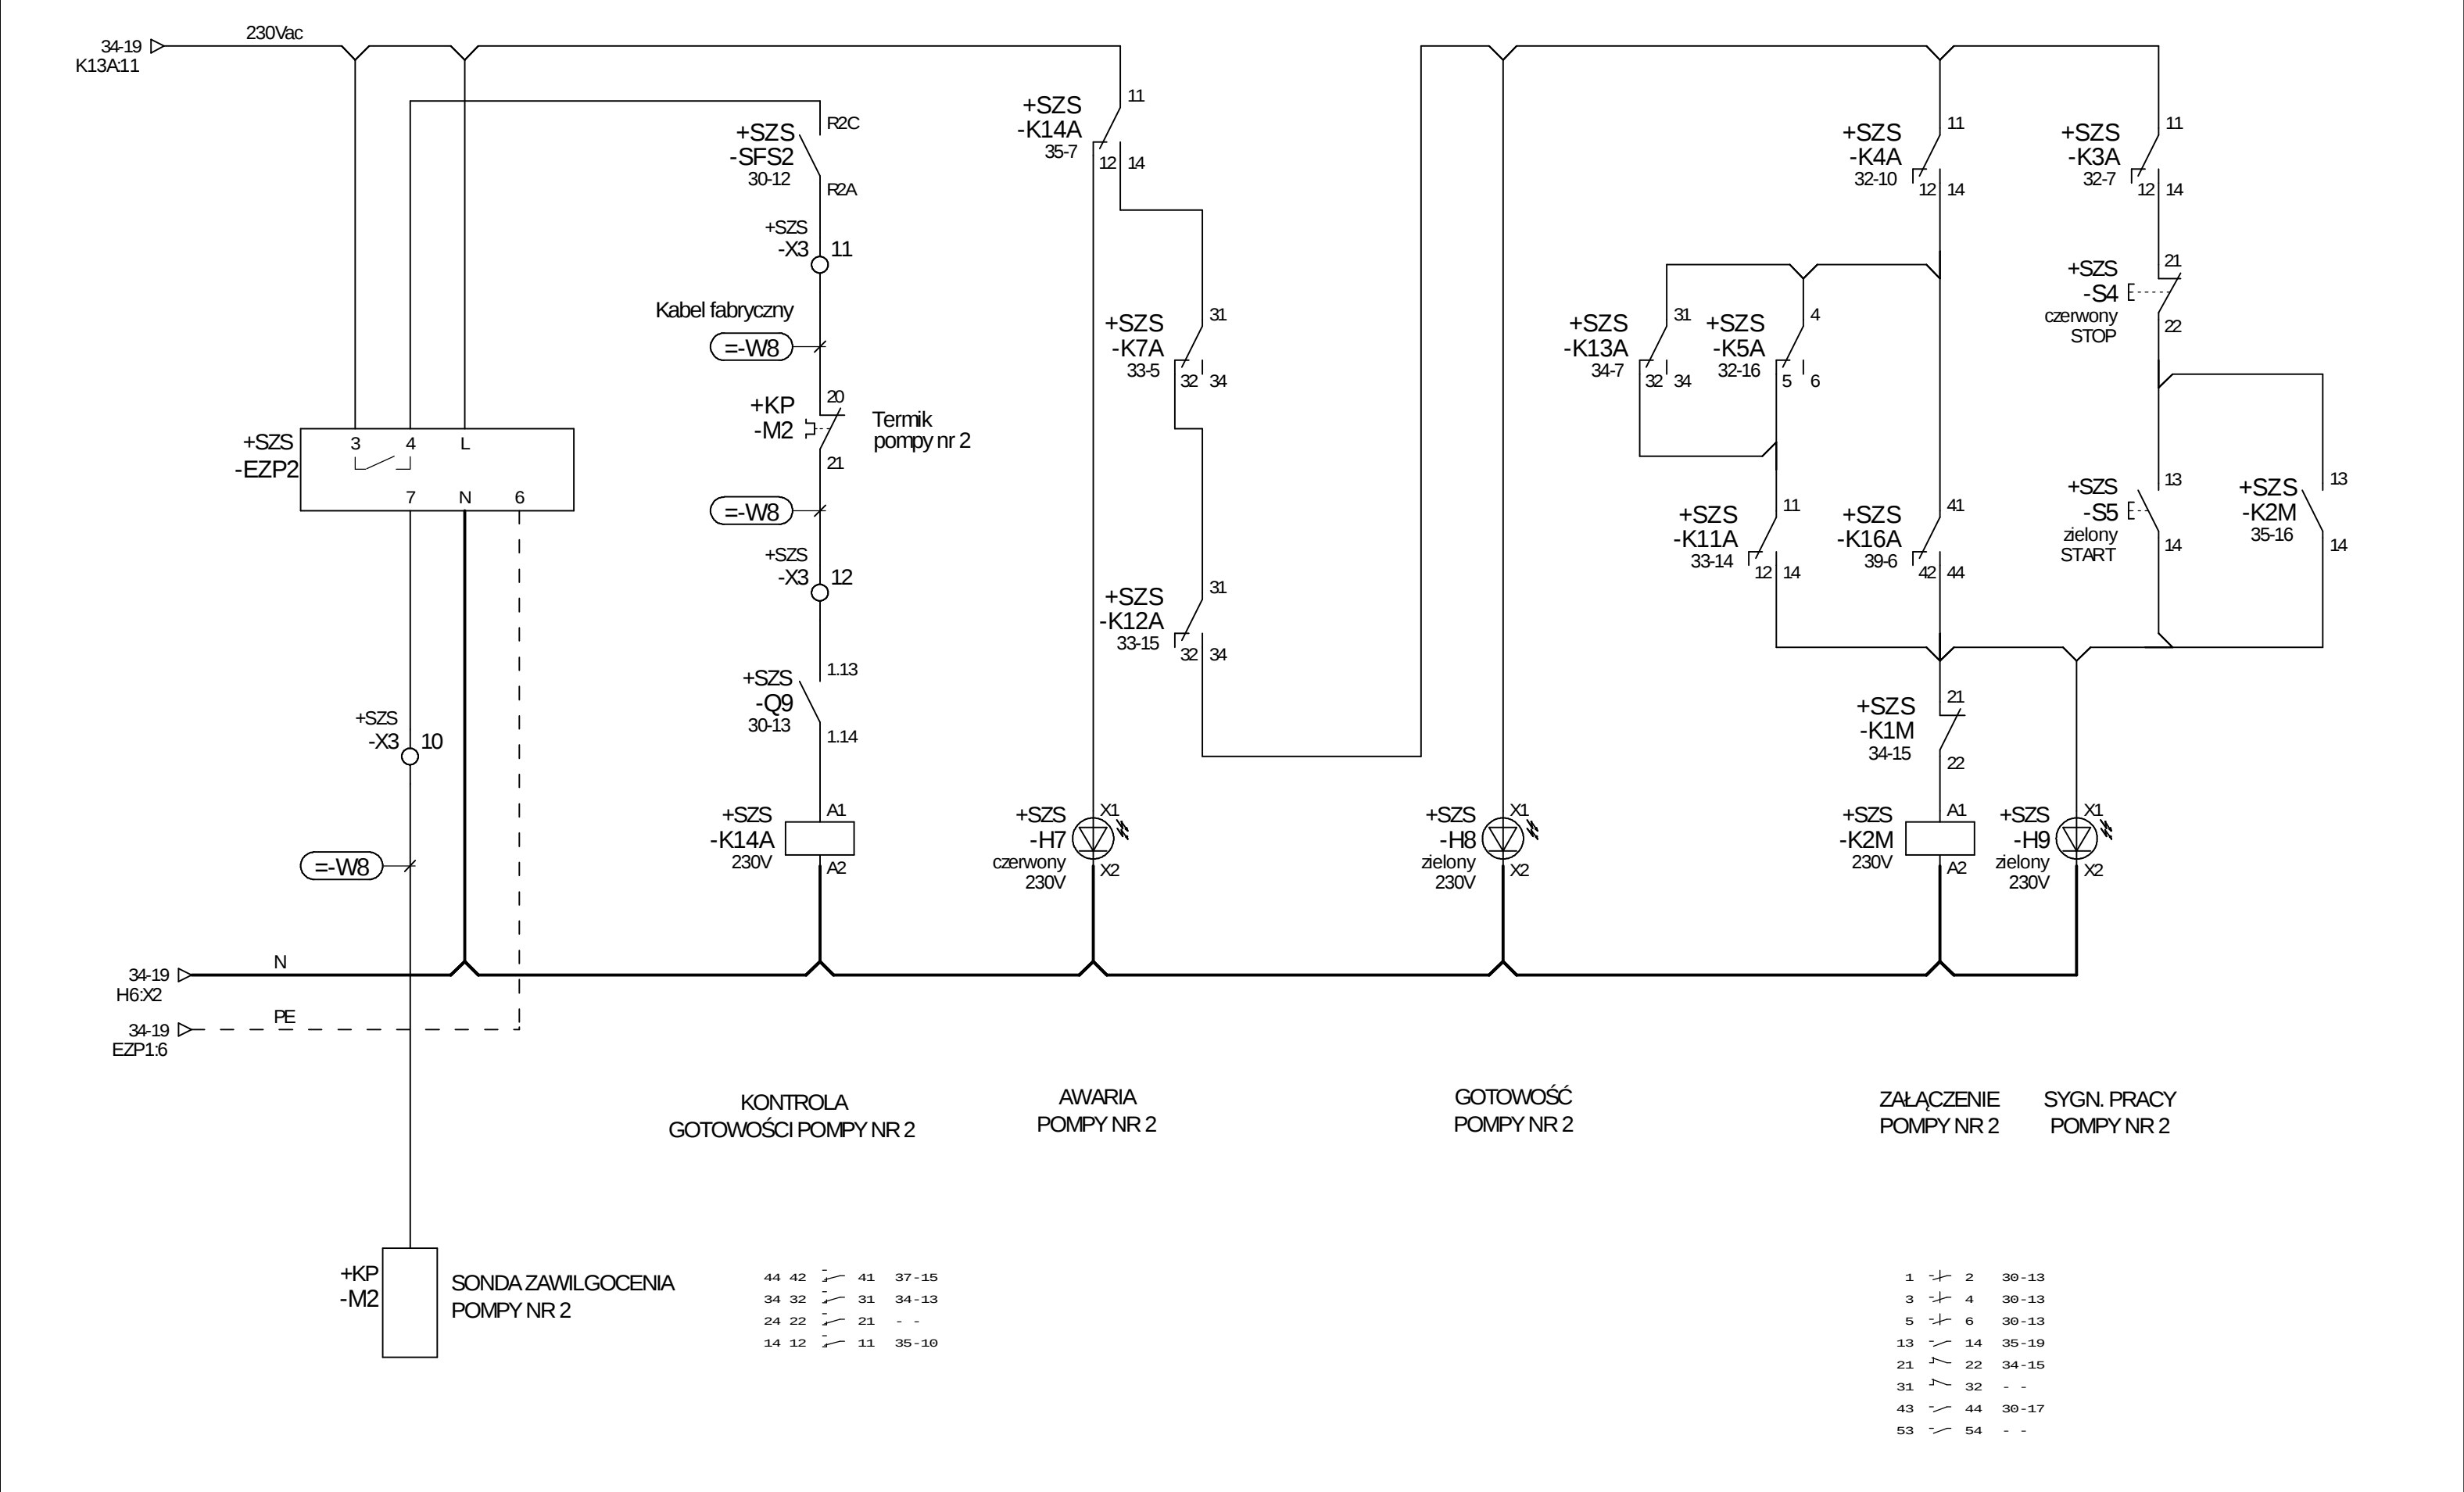

MODUŁ TELEMETRYCZNY GSM/GPRS

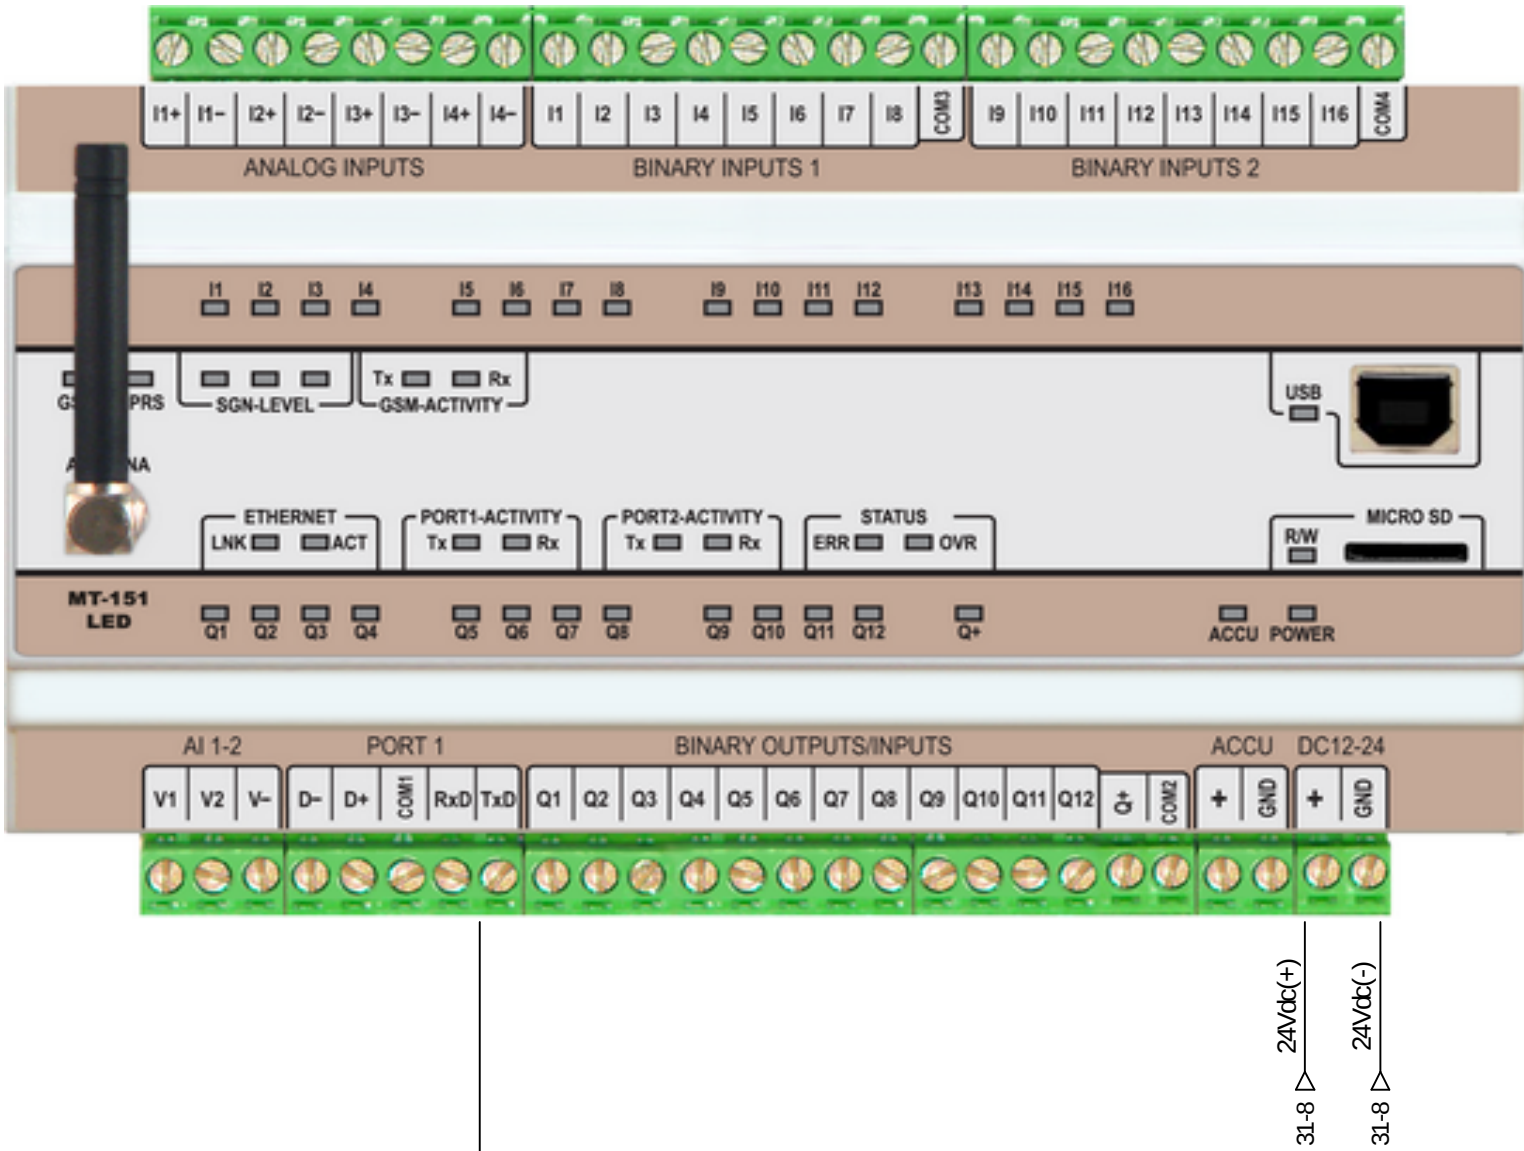



PANEL OPERATORSKI

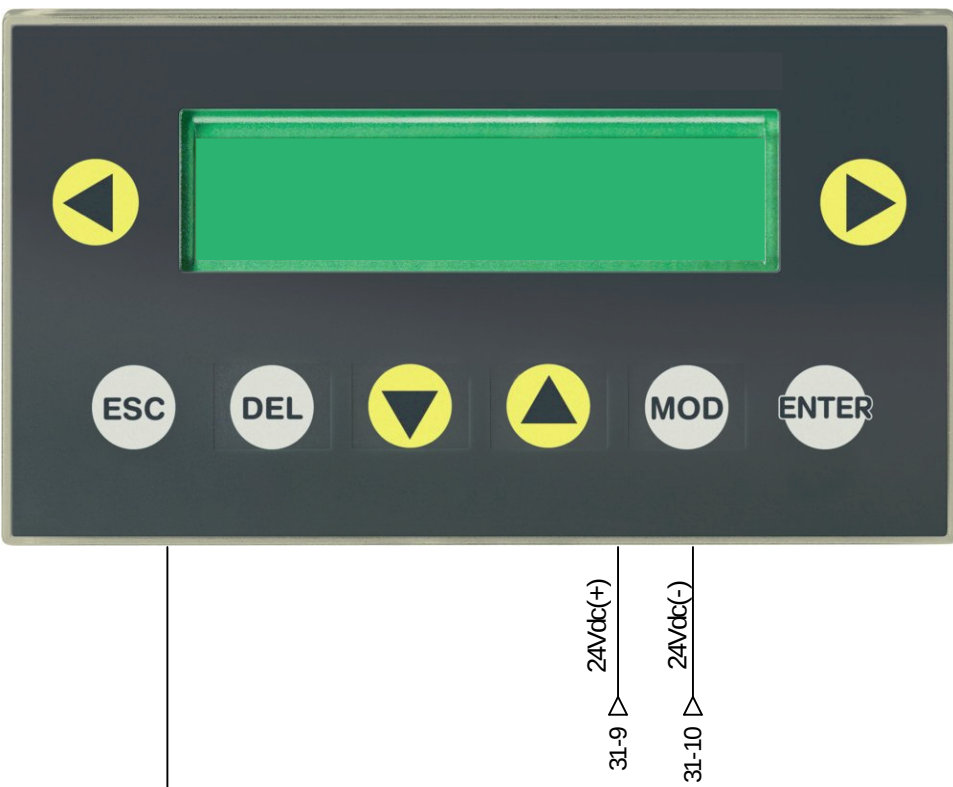



30-20 ← Modbus

Komunikacja -RS485/Modbus RTU

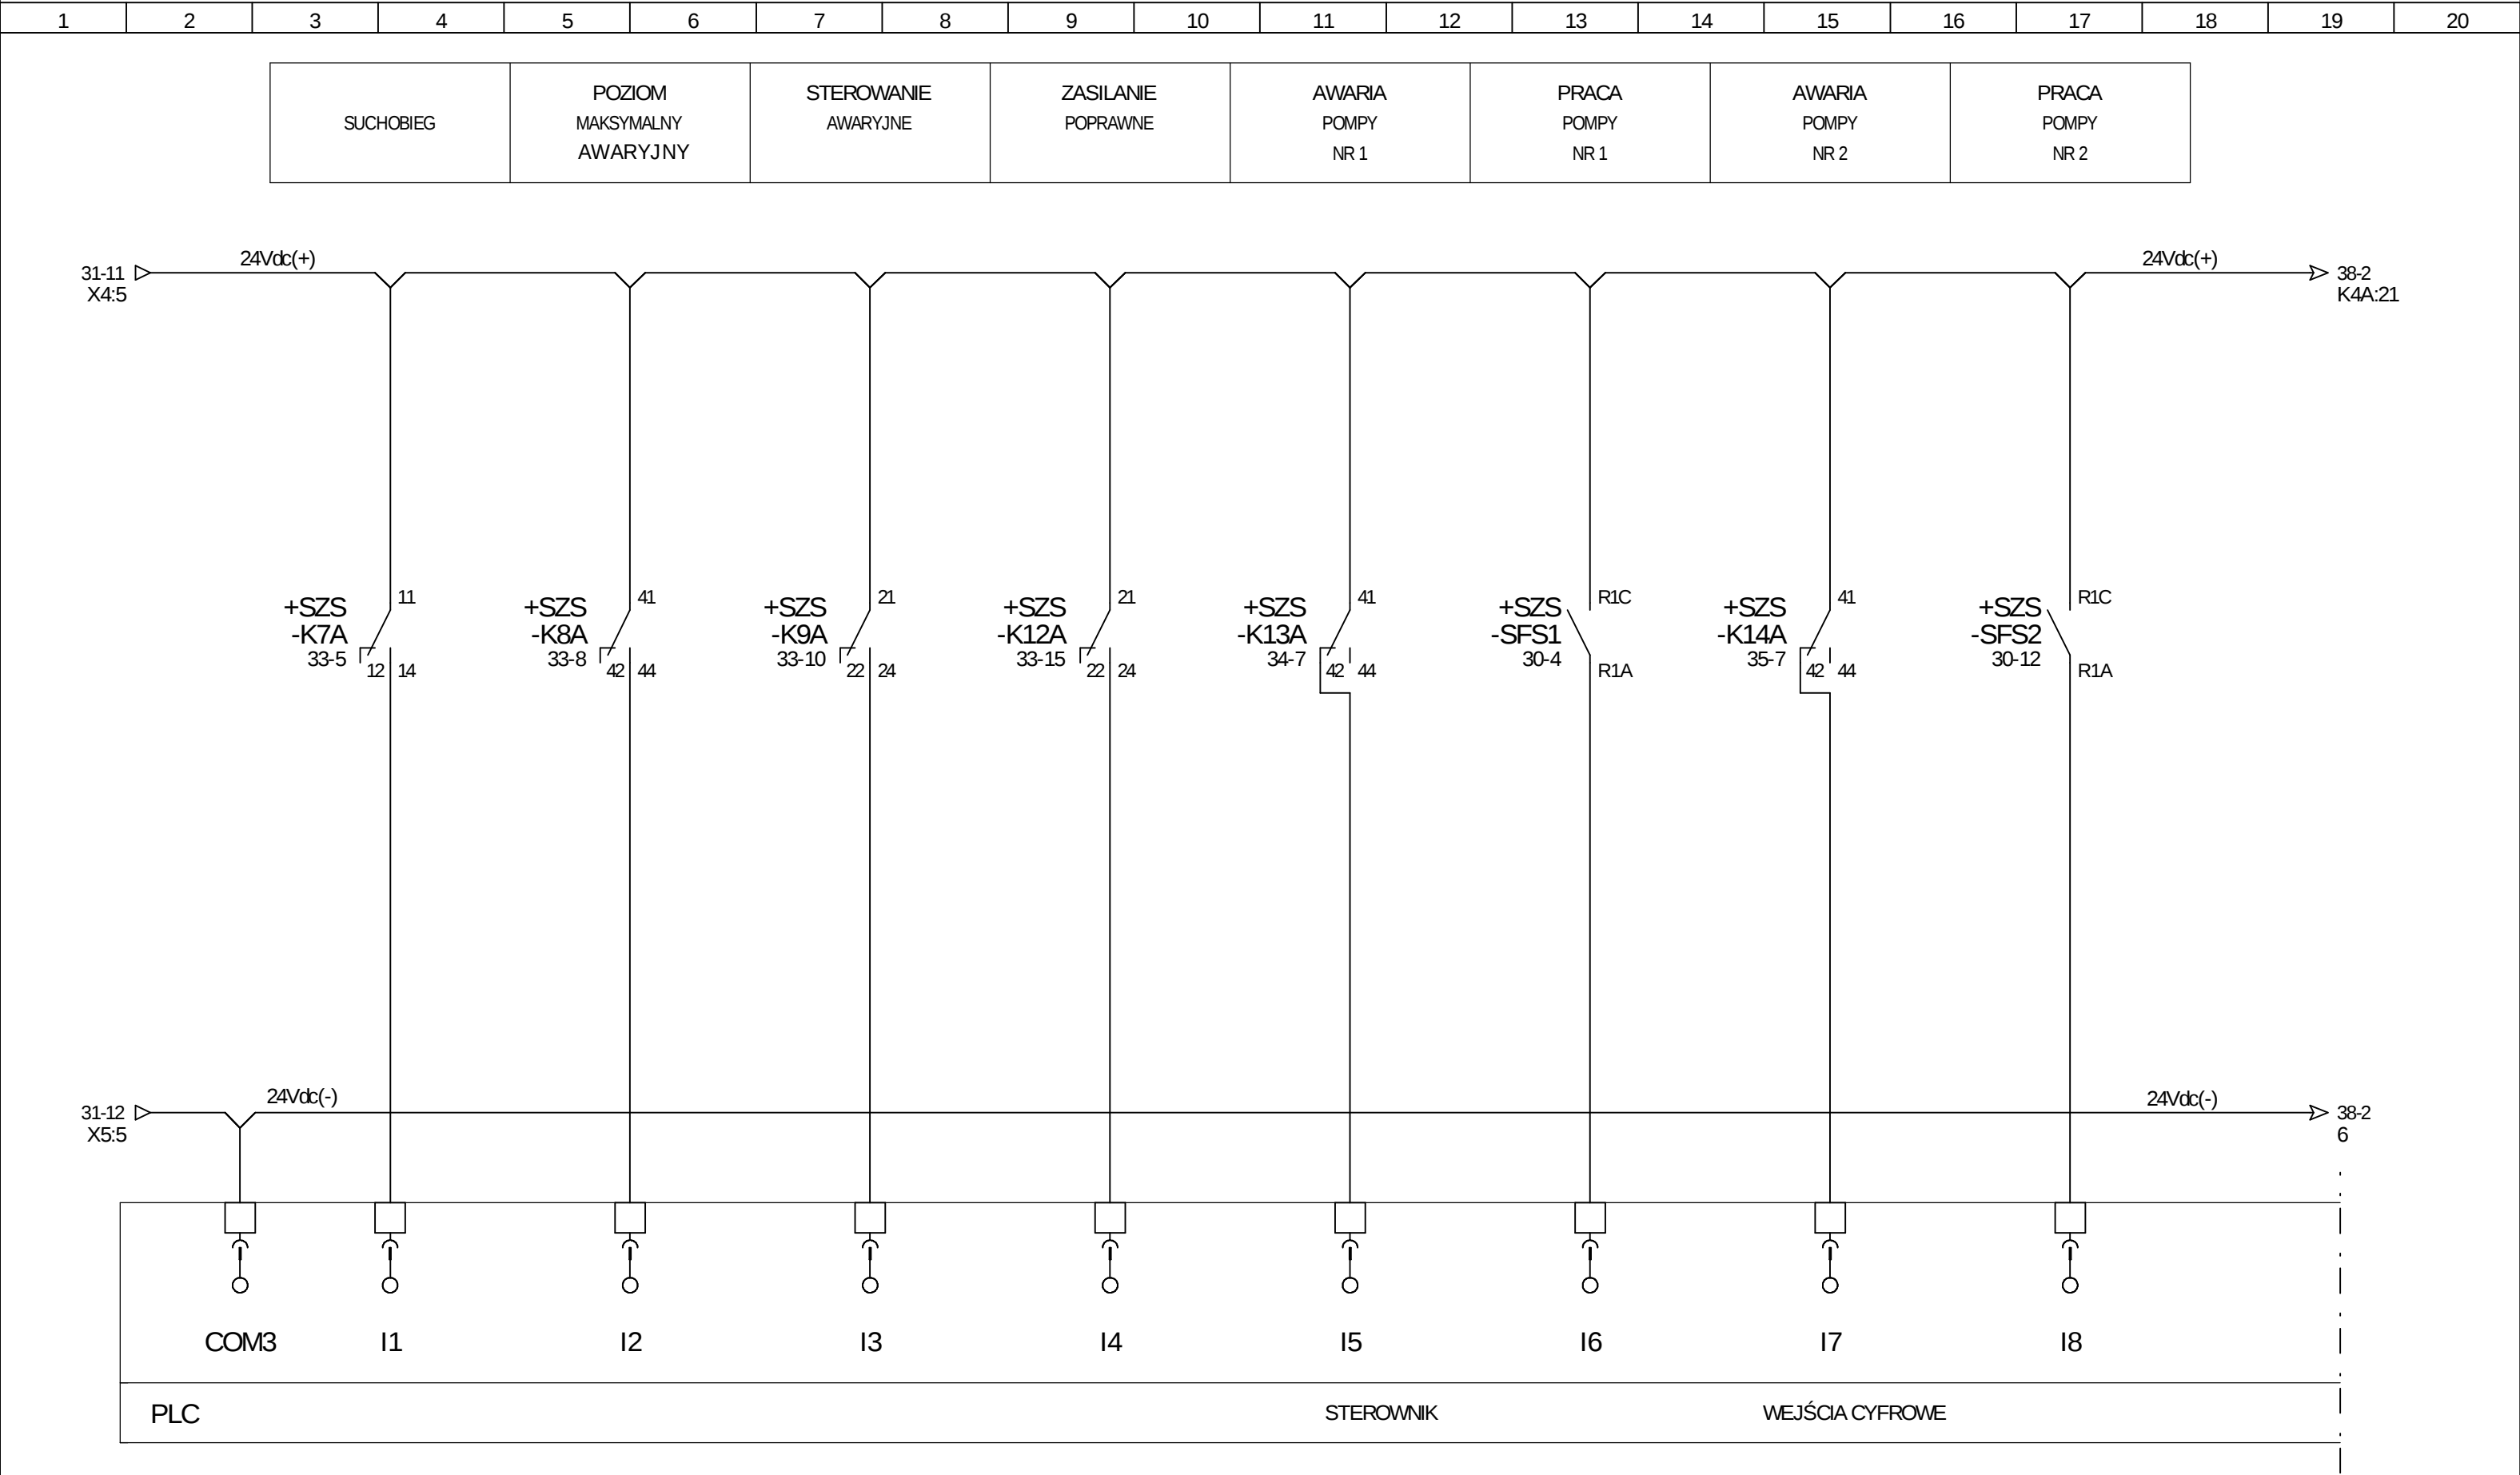

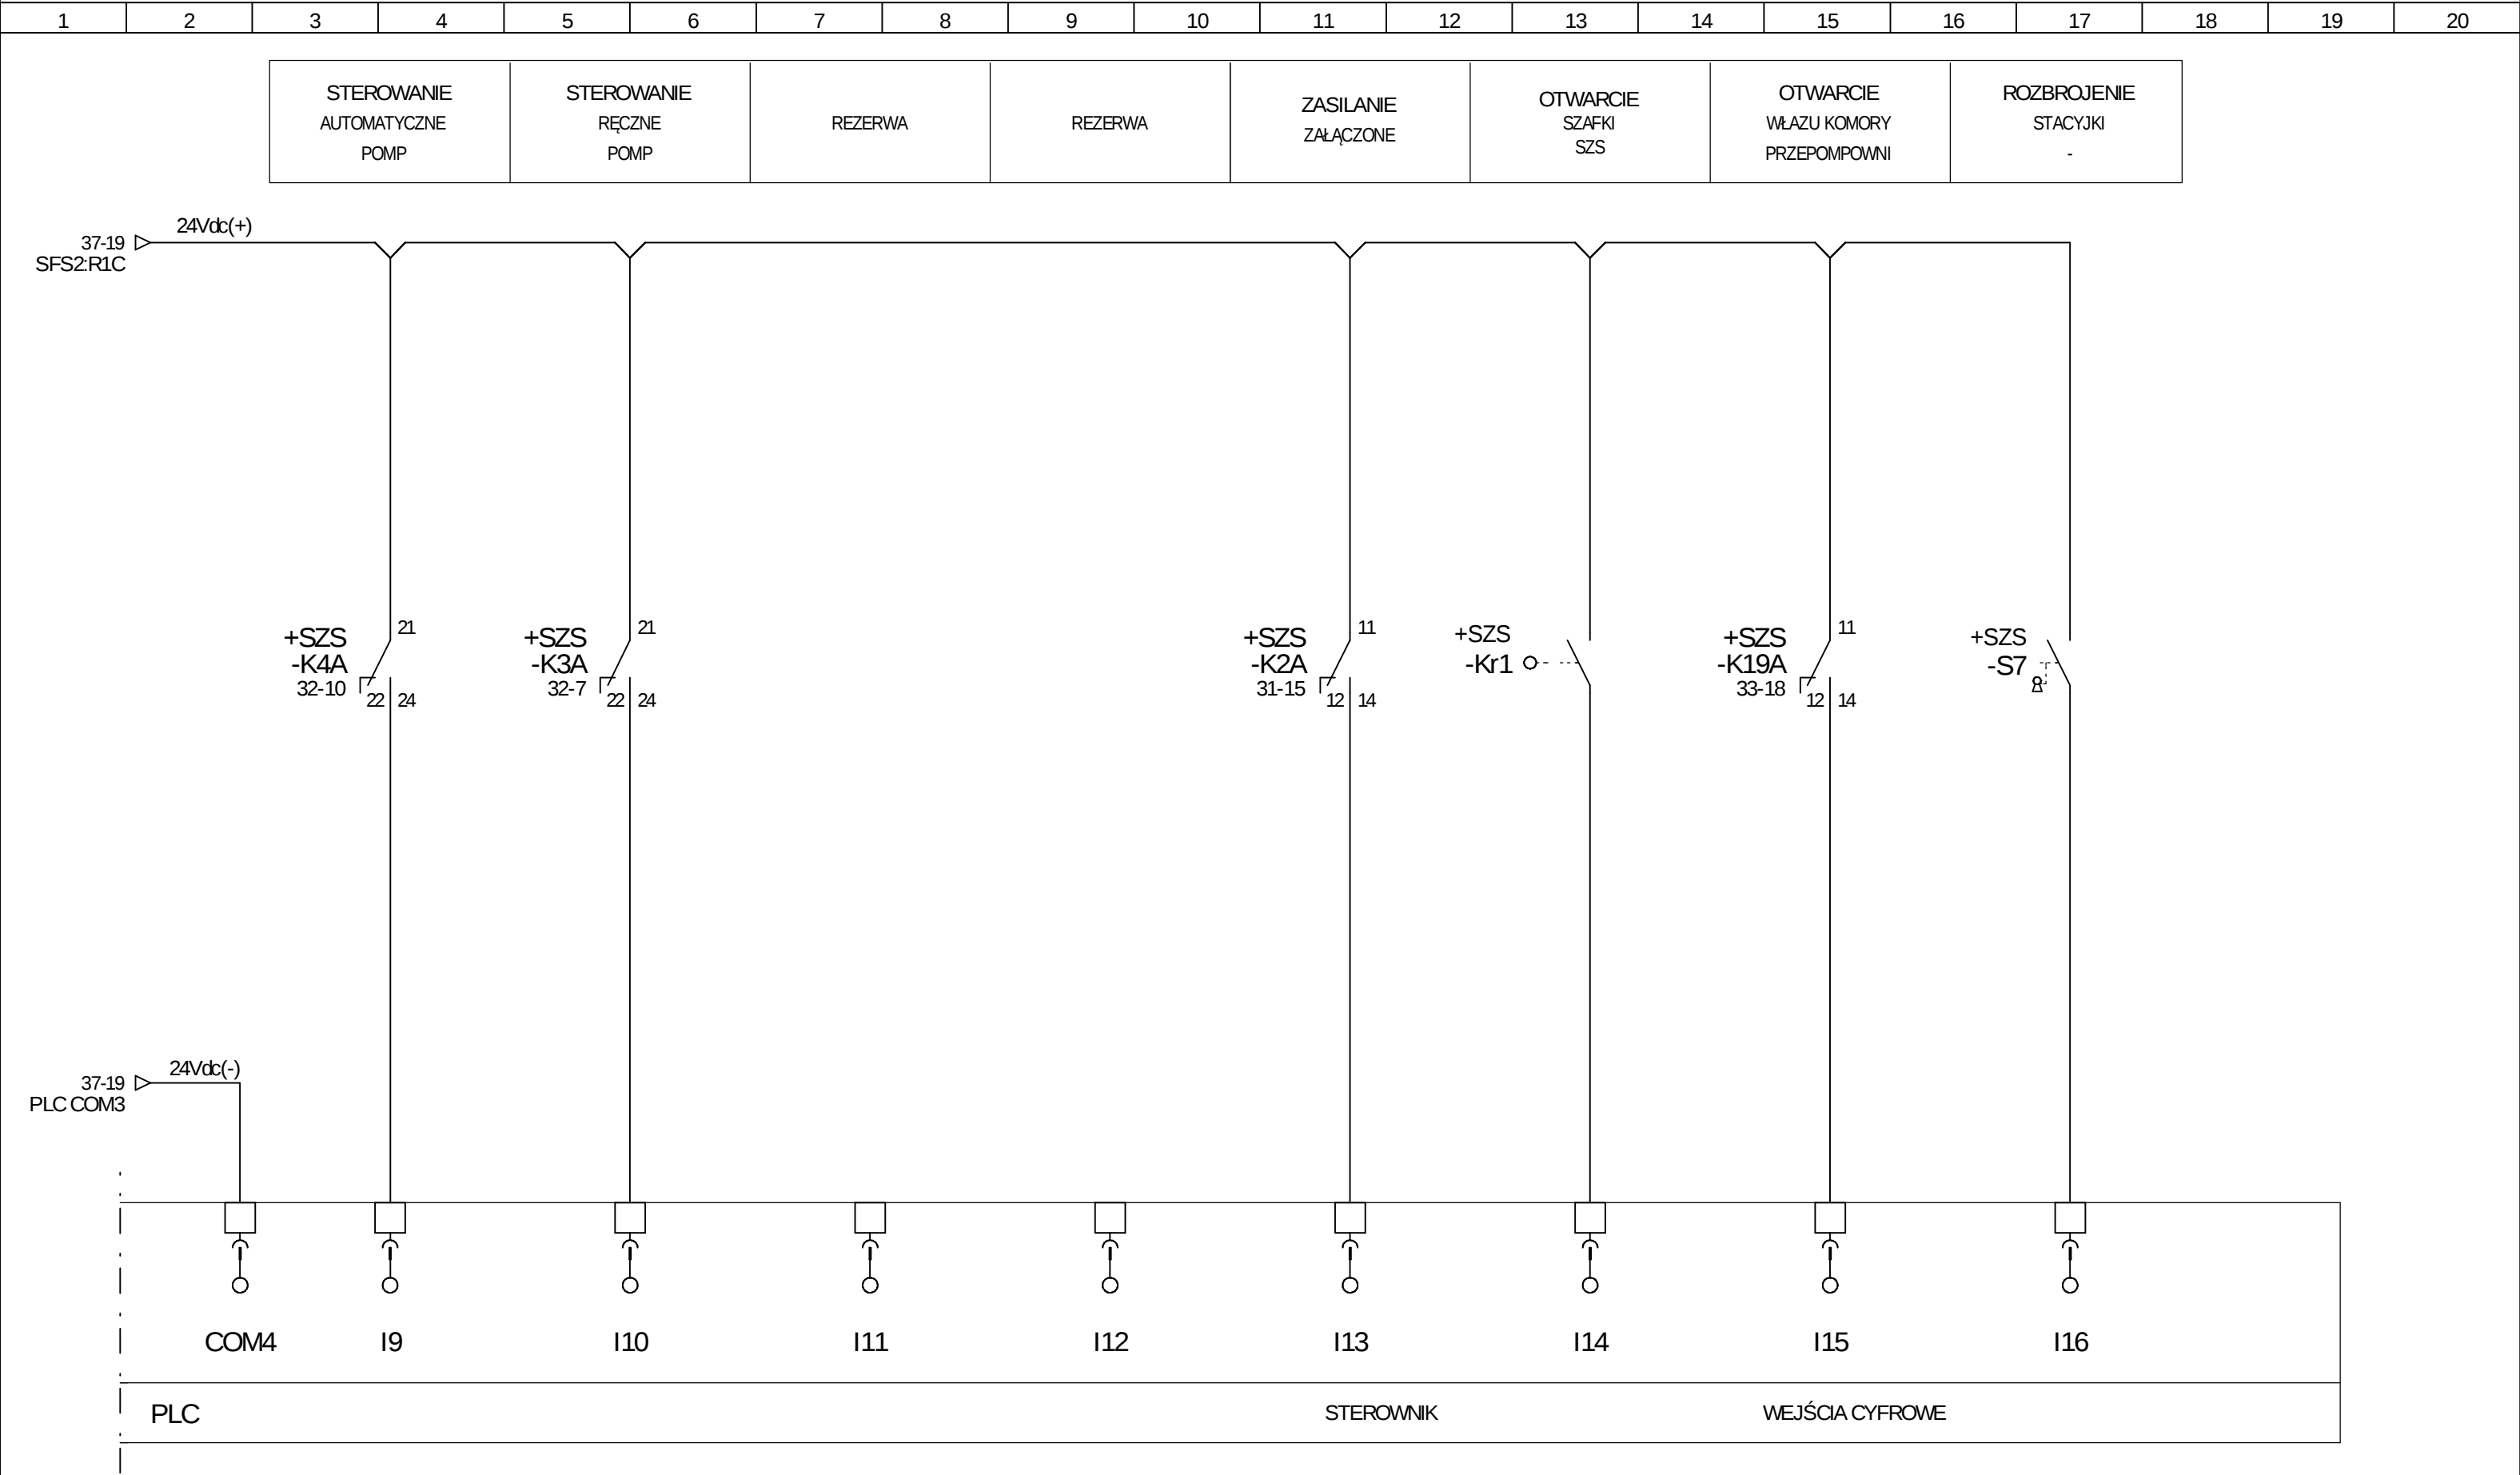

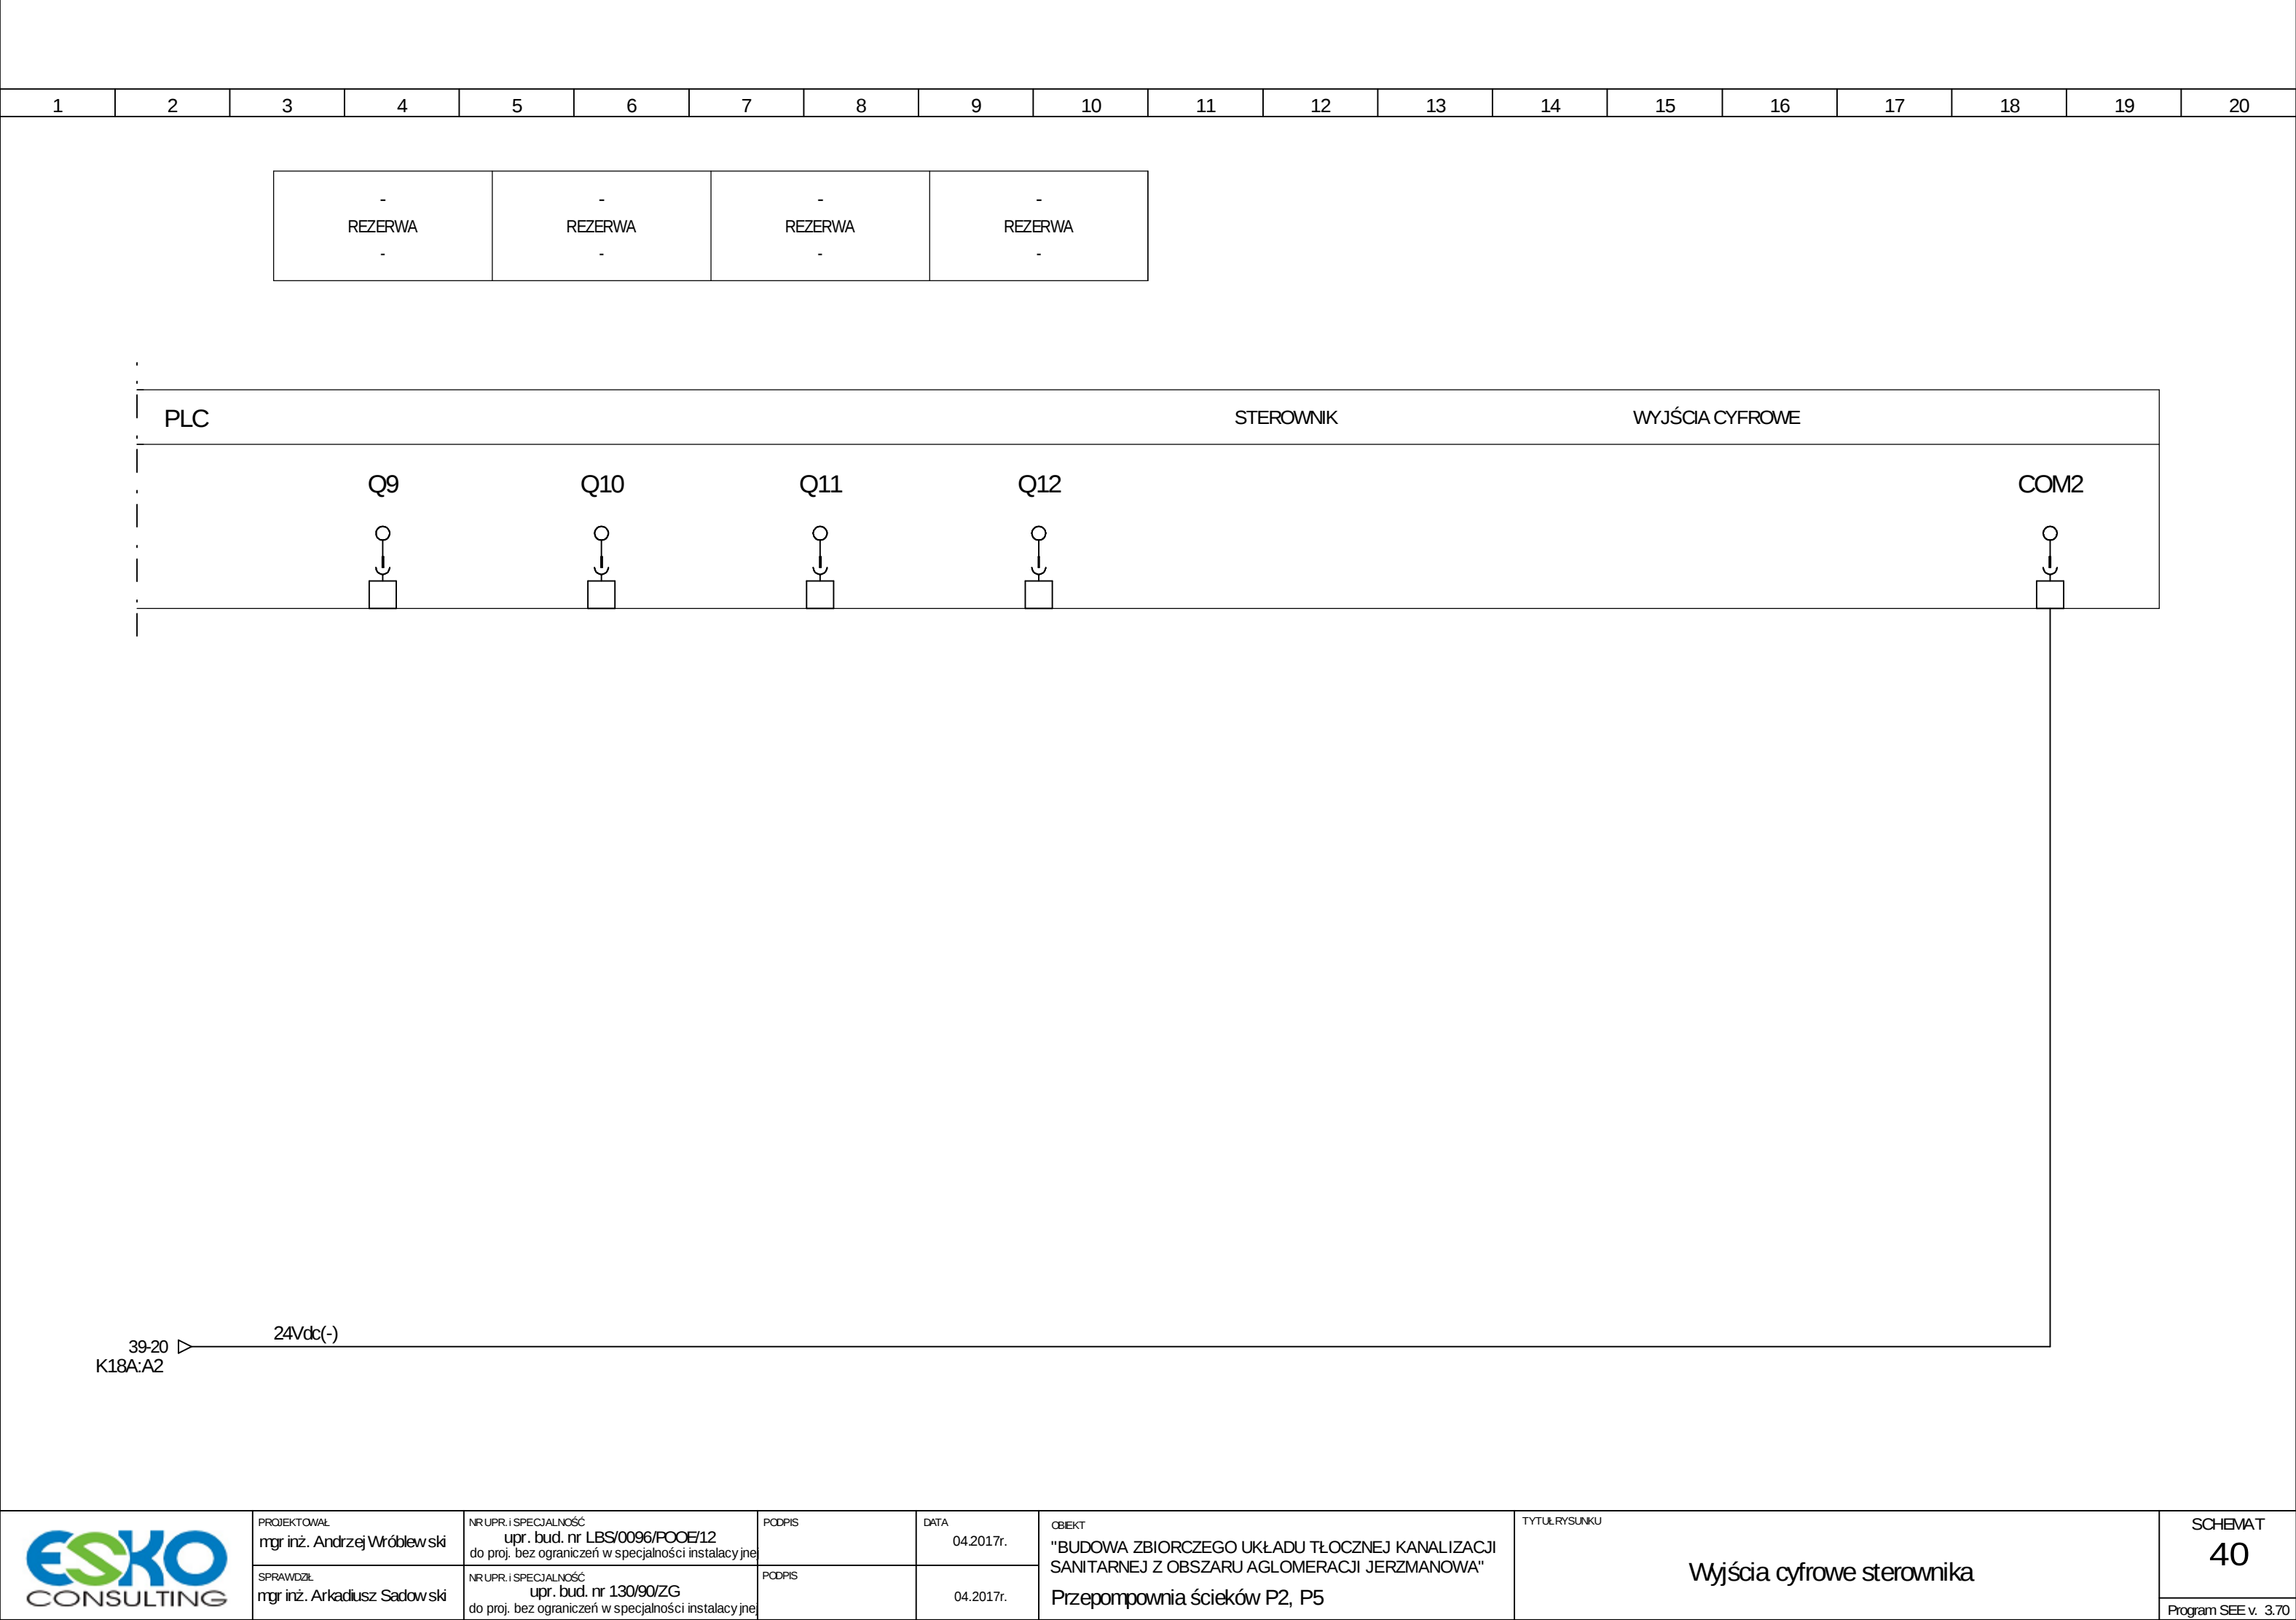


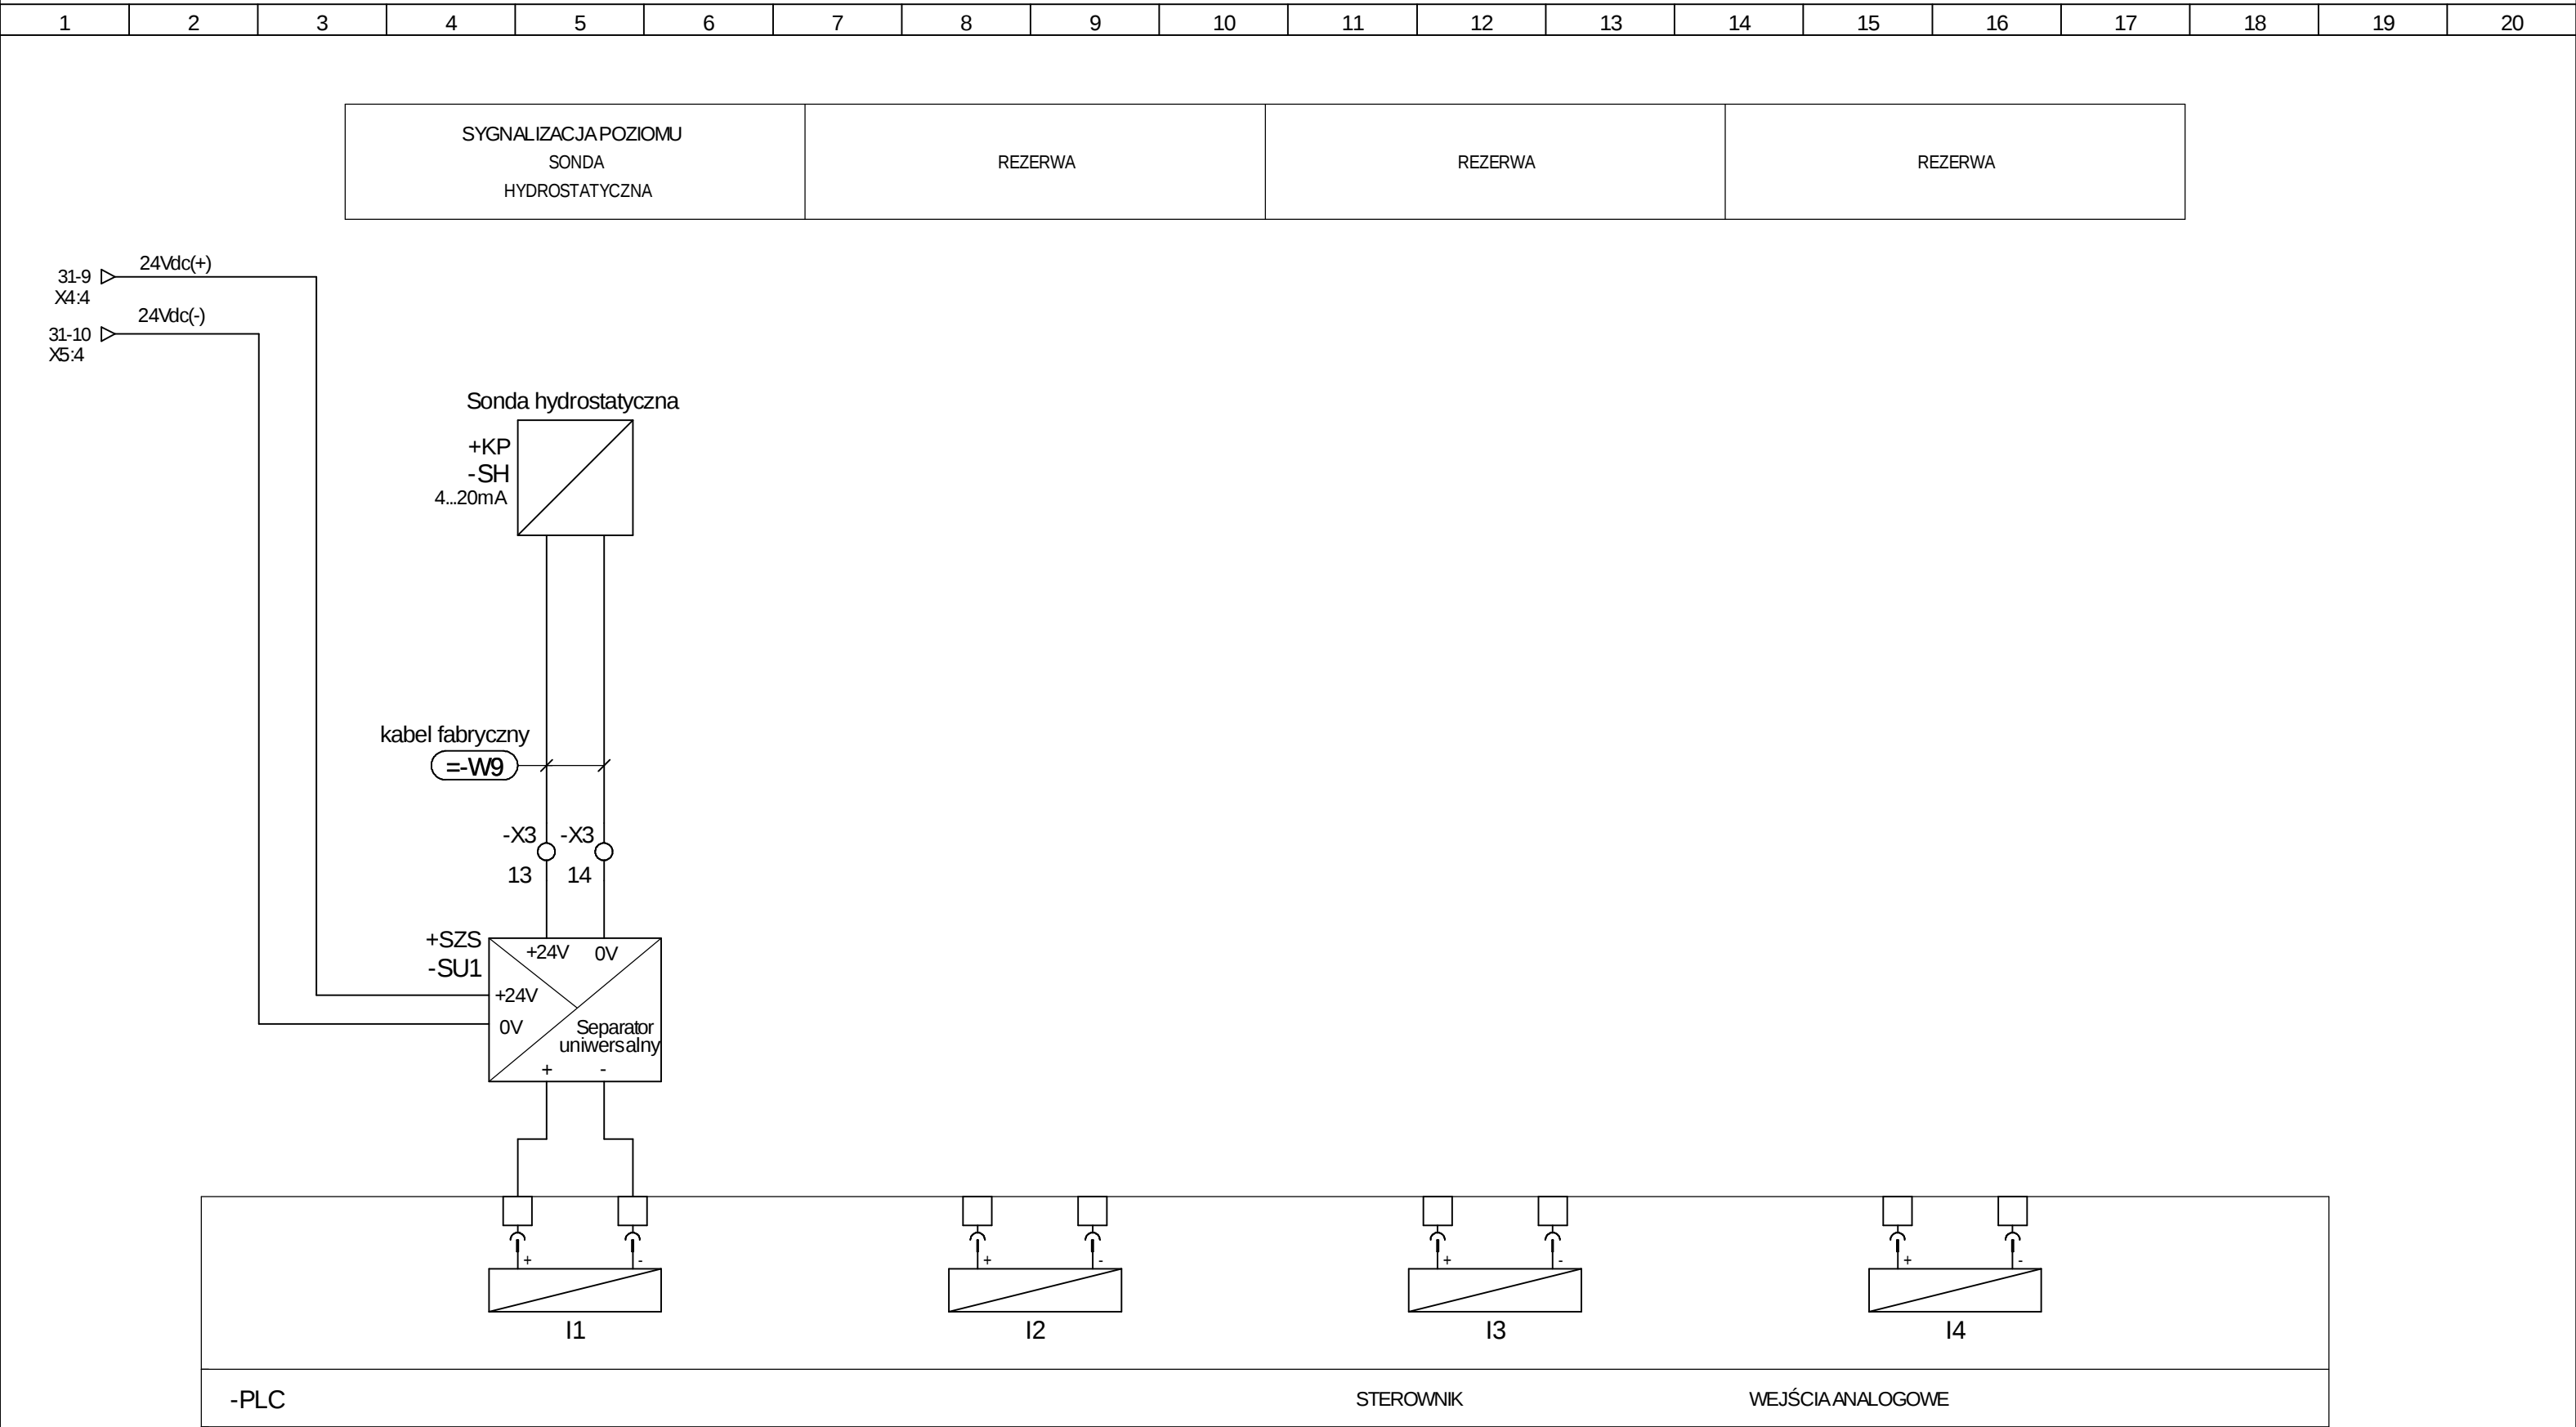

-PLC

STEROWNIK

WEJŚCIA ANALOGOWE

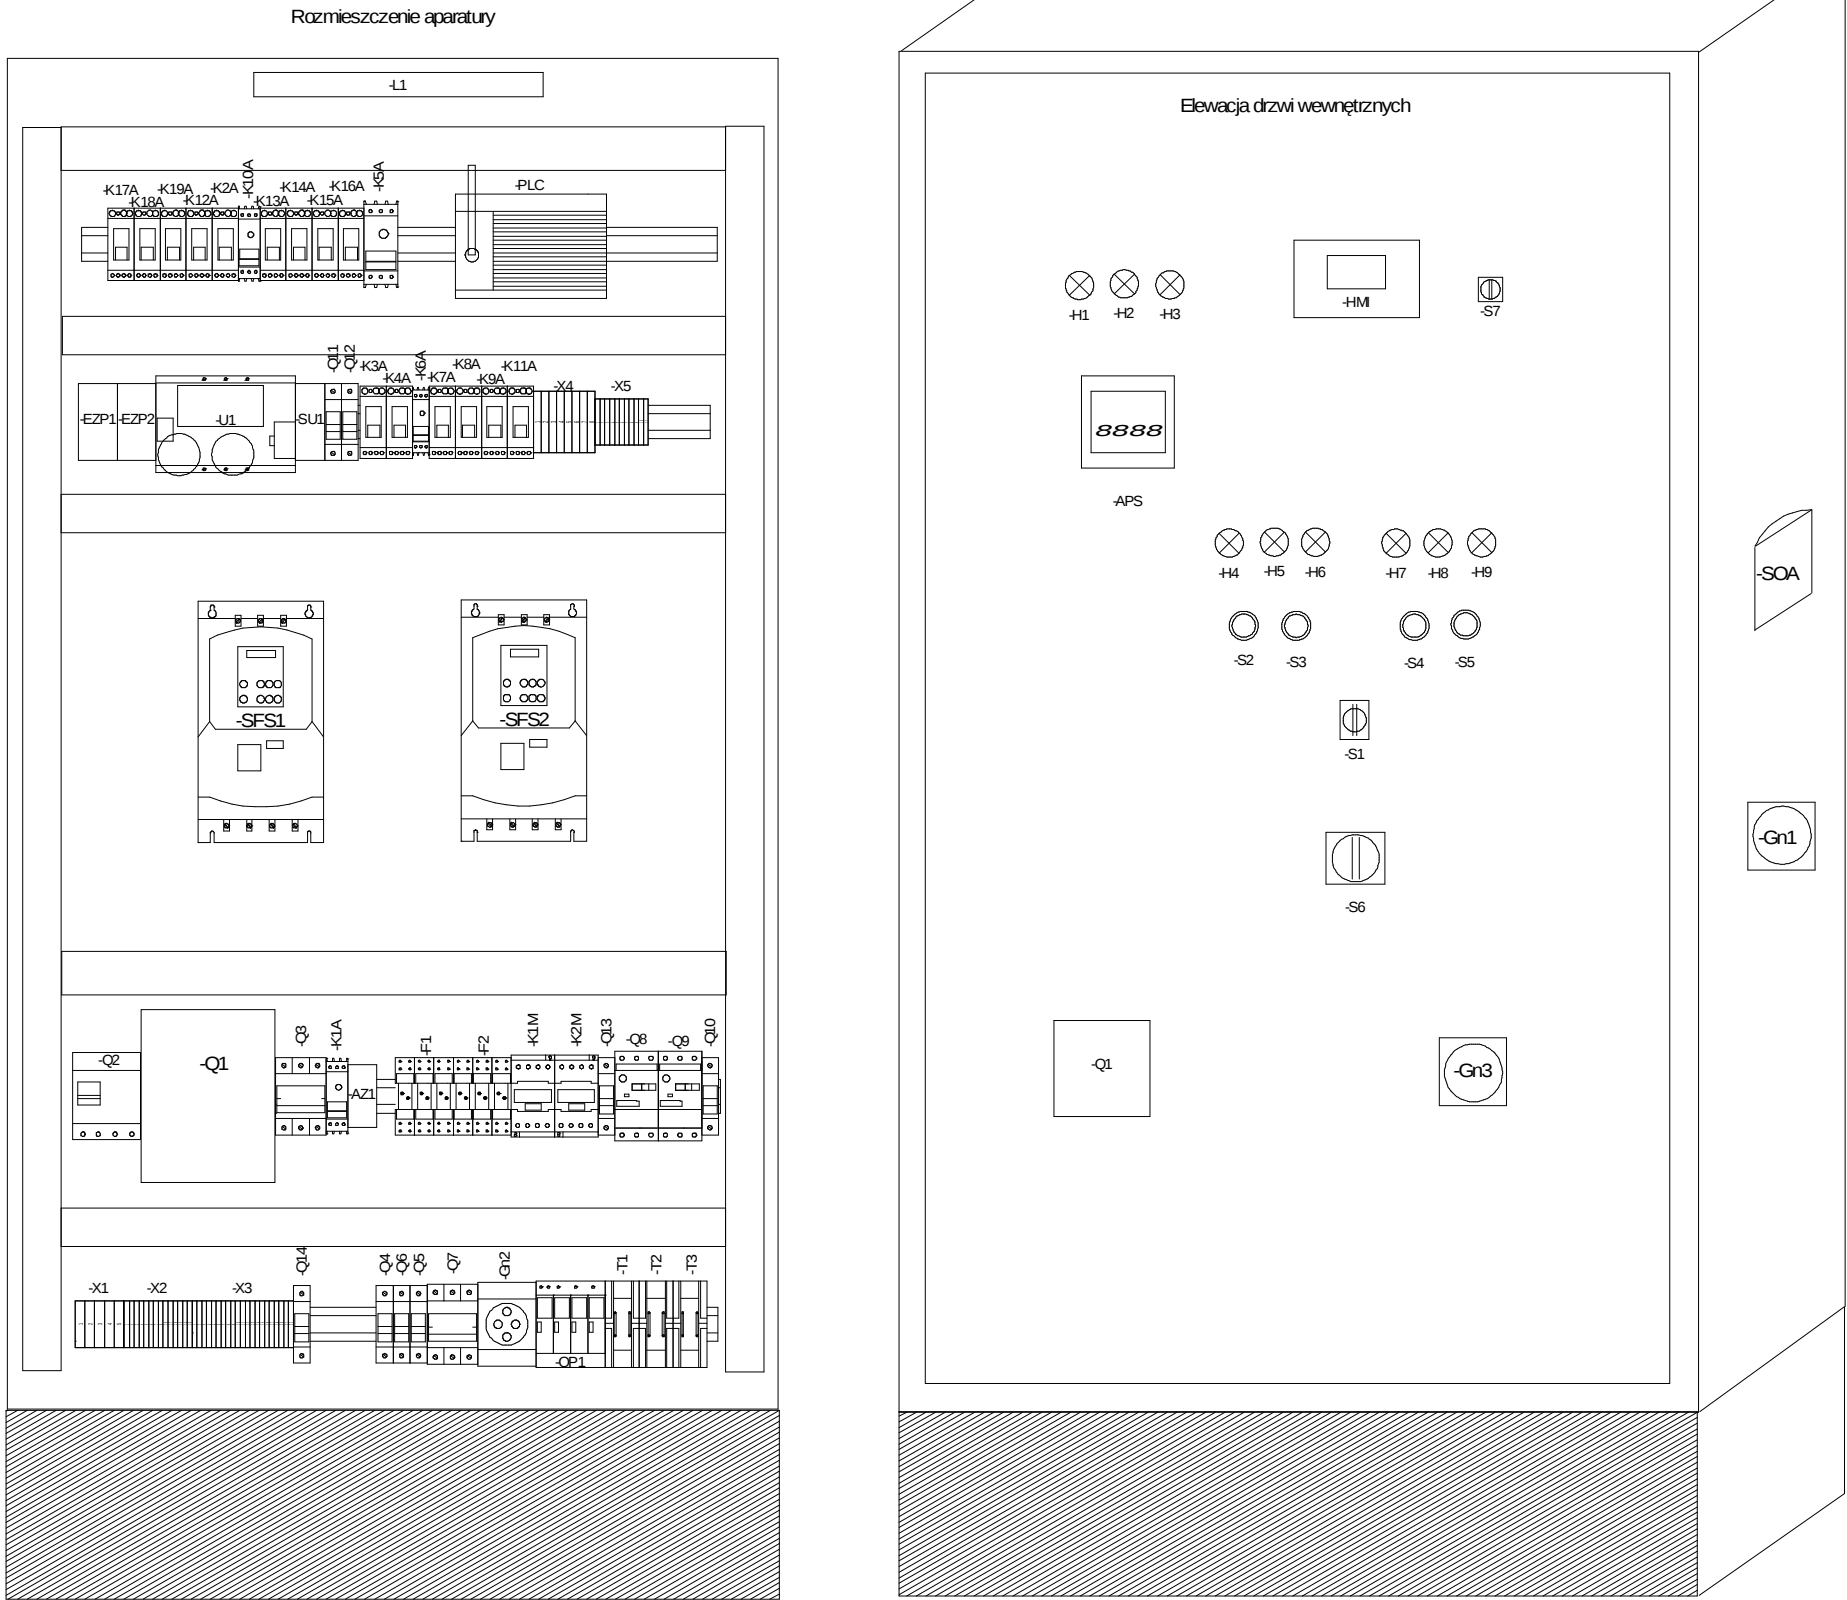

Obudowa z poliestru o stopniu ochrony min. IP65, wyposażona w drzwi wewnętrzne, płytę montażową, zamkiem i kluczem, o wymiarach 1400x800x400 (wys. x szer. x głęb.)
posadzona na cokole z tworzywa